



34935 Flyover Ct. Bakersfield, CA 93308
Phone: (661) 588-8085 | Fax: (661) 588-8295

INSTALL INSTRUCTIONS:
IPAD Holder Kit for UTVs
SKU: 599-90400

PARTS LIST FOR SKU: SKU: 599-90400

NO.	QTY.	PART #	DESCRIPTION
1	1	2341	iPad Holder Base Plate
2	1	2479	iPad Holder Right Leg
3	1	2479	iPad Holder Left Leg
4	2	6246	Adjustment Pad
5	1	6172	Latch Base
6	1	6171	Latch
7	1	6169	iPad Seat Right
8	1	6170	iPad Seat Right
9	7	HARDWARE-6-32-NYLOCK	64407A101_STL Nylon-Insert Lock Nut
10	7	HARDWARE-6-32X1/2-BOSS-FH	Hex Drive Flat Head Screws, 6-32 Thread Size, 1/2" Long
11	1	HARDWARE-1/8-DOWELPIN	90145A487_1/8"X2 1/2" Dowel pin
12	6	HARDWARE-#6X1/2-FH	Flat Headed Forming Screws for Brittle Plastic Number 6 Size, 1/2" Long
13	4	2480	iPad Holder Leg Spacers
14	1	2481	iPad Holder Latch Spacer
15	8	HARDWARE-10-32-SS-FLATWASHER	#10 Flat Washer
16	4	HARDWARE-10-32-LOCKNUT	10-32 NY Lock Nut
17	4	HARDWARE-10-32X3/4-SS-SHCS	10-32 SHCS X .750
18	2	HARDWARE-TORSIONSPRING	Torsion Spring 120 Degree Angle, Left-Hand Wound, 1.342" OD



WARNING

Please read this entire instruction sheet before beginning installation. Proper installation of these components requires a qualified mechanic. Always wear safety glasses when using power tools, and take appropriate precautions when working under a vehicle. If these instructions are not properly followed you may jeopardize your, and your passenger's safety, and severe frame, suspension or tire damage may also result from improper installation.

INTRODUCTION

The Cognito iPad holder is compatible with 9.7" and 10.9" iPads and can be installed using either a VESA 4x100mm or AMPS 1.5" x 1.188" bolt pattern. Thickness of holder can be adjusted with respect to iPad thickness using shims provided with the kit. Majority of sheet metal parts are made with Aluminum and powder coated in black.


REQUIREMENTS

- Read instructions carefully and study the pictures before attempting installation.

INSTALLATION

1. Adjust the lower arms, part number 2 in Figure 1 below, to fit your iPad by loosening the two screws on each arm and sliding the arms along their slots.
2. Adjust for the thickness of your iPad's case by installing or removing shims, labelled 13 and 14 in Figure 1 below.
3. Install assembly onto vehicle using the 4x100 VESA mount or the AMPS mount in the center of the base plate using the 4 10-32 screws.

Figure 1: Assembly

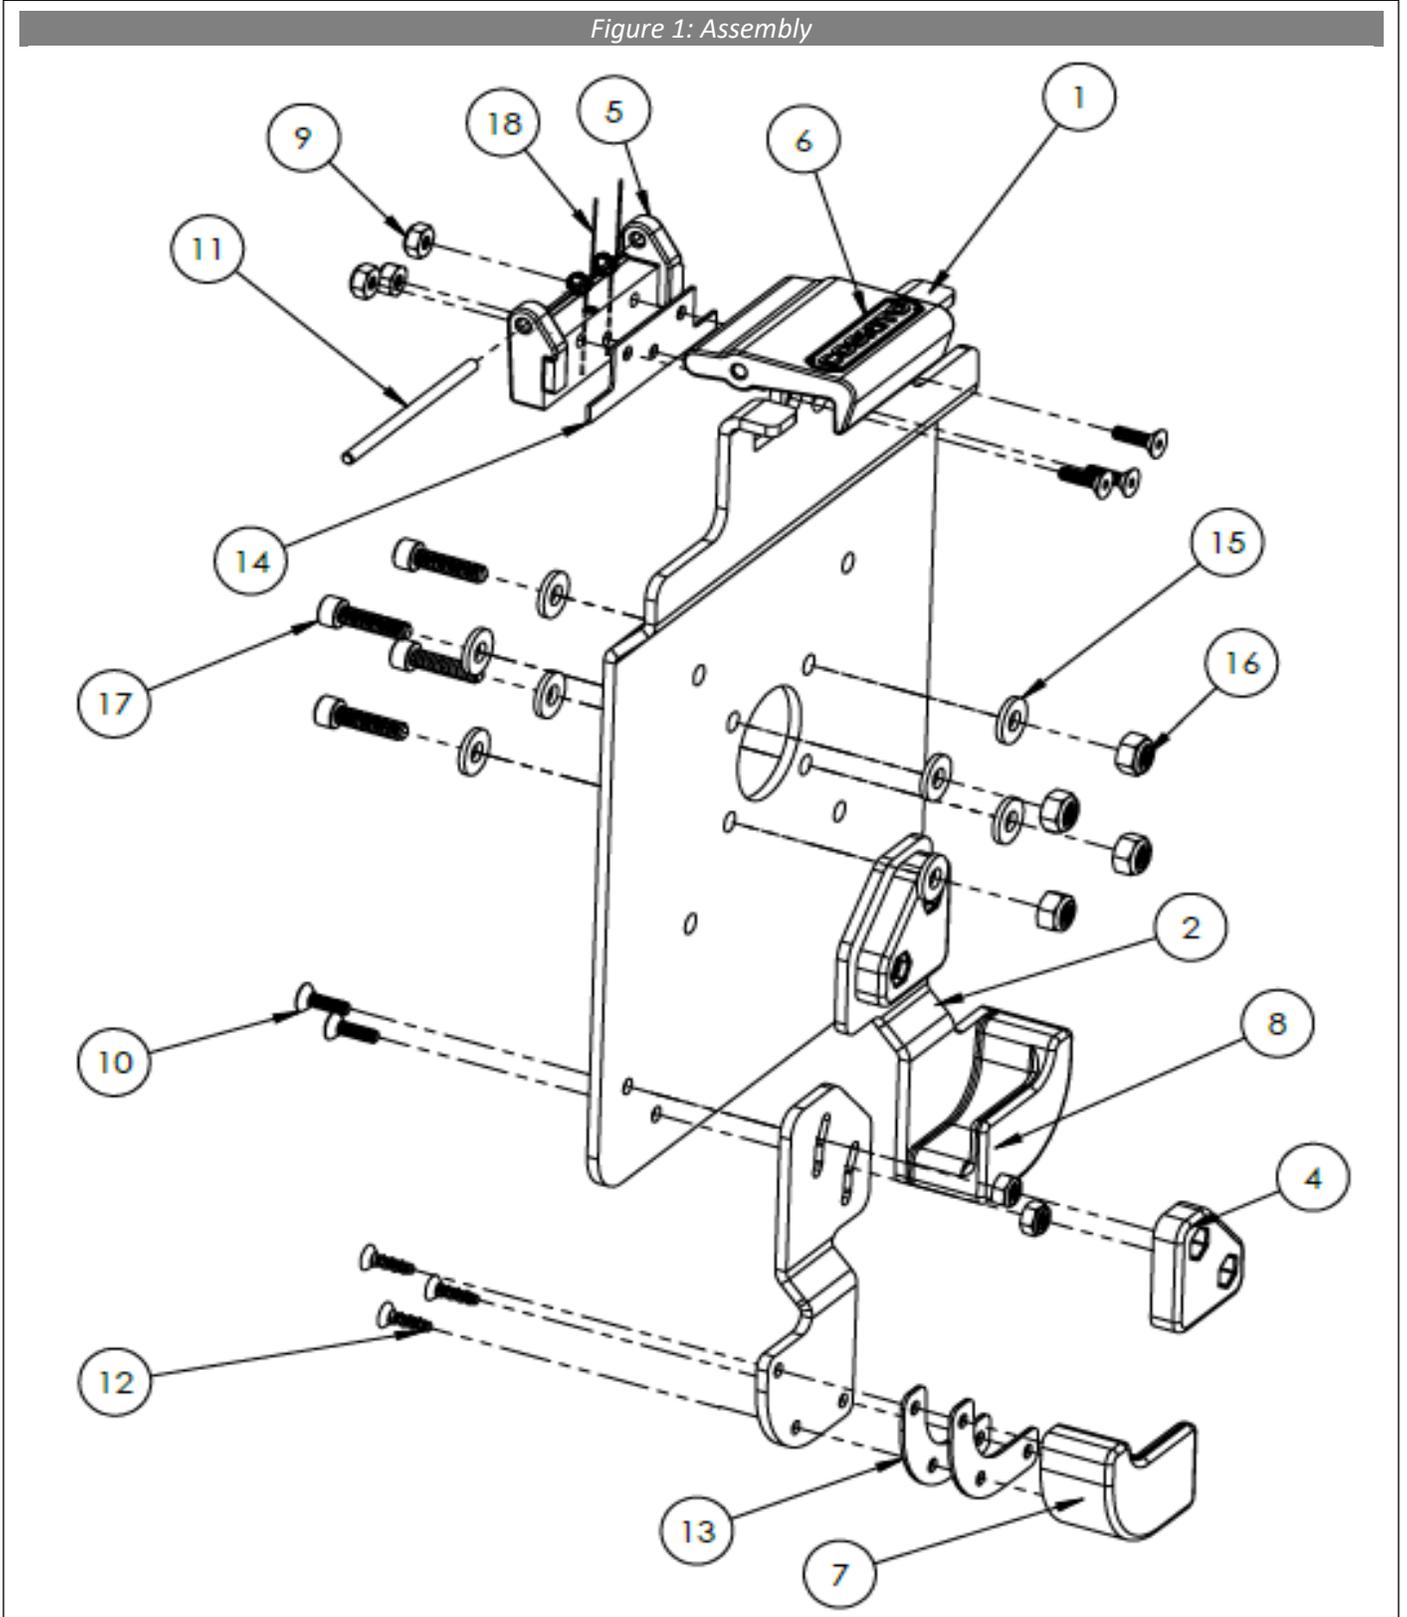

WARRANTY / RETURN POLICY / SAFETY

Cognito Limited Lifetime Warranty

Cognito Motorsports, Inc. hereinafter “Cognito,” warrants to the original retail purchaser, that its suspension products are free from workmanship and material defects for as long as the purchaser owns the vehicle on which the product(s) were originally installed. This warranty will be void if any modifications are made to the components, including alterations to the surface finish, i.e.; painting, powder coating, plating, and/or welding, or if they are improperly installed. Cognito truck suspension products are not designed nor intended to be installed on “competition” vehicles used in race applications, stunt or for exhibition purposes that are outside of the intended operating conditions specified by the manufacturer. Racing and competition are defined as any contests between two or more vehicles; or vehicles competing individually on off road circuits in timed events (whether or not such contests are for an award or prize).

This warranty does not include coverage for police, taxi, government or commercial vehicles, and the warranty does not cover Cognito products sold outside of the USA. Cognito’s obligations under this warranty are specified and applied at its sole discretion, and warranty coverage is limited to repair or replacement of the defective product(s). Any and all costs of removal, installation or reinstallation; freight charges, incidental or consequential damages associated with the covered products are expressly excluded from this warranty.

The following items are exempt from Cognito limited warranty coverage: bushings, bump stops, tie-rod ends (Heim joints) and limiting straps. These parts are “consumables” and designed to wear as a normal part of their duty cycle, therefore they are not considered defective when worn. The aforementioned products are warrantied separately against defects in workmanship, for 60 days from the date of purchase. As a condition of warranty validation, respective Cognito suspension components must be installed as a complete system (not combined with non-Cognito hardware or ancillary parts). Any substitutions or omission of required components will void the warranty. Some minor cosmetic wear and imperfections may occur to parts during shipping, which is not covered under this warranty. This limited warranty does not apply to any components that have been subjected to collision damage, negligence, alteration, abuse, or misuse, and coverage does not extend to products manufactured by third-party companies. Cognito reserves the right to supersede, discontinue, or change the design, finish, part number and/or application of its parts when deemed necessary, without notice.

Return Policy

Product returns will not be accepted without prior written approval from an authorized Cognito representative. All products being returned must be shipped via trackable, prepaid freight. Returned products are subject to a 25% percent restocking fee. The eligible return period for products purchased directly from Cognito is 30 days from the verified date when the product(s) were originally received by the purchaser.

Product Safety Advisory

The installation of Cognito steering and suspension components will modify your vehicle’s original factory equipment and geometry, which may cause it to handle differently than a stock (unaltered) vehicle. Installation of these components is not intended to strengthen nor reinforce the vehicle’s frame, nor are they designed to increase rollover protection. It is necessary to periodically inspect all suspension and drive train components for proper attachment, torque specifications, operation, and for any potential unusual wear or damage. Installation of these parts will modify the height of the vehicle and may raise the center of gravity. Modifying vehicle height combined with off road operation may increase your vehicle’s susceptibility to rollover conditions, which may cause serious injury or death. Many states regulate allowable vehicle height modifications, and it is your responsibility to know and comply with the legal requirements specified by the laws where you reside. Modifications to your vehicle’s ride height may also affect the ride quality, driver input response, trackability and handling, and wear to your vehicle’s suspension components and tires.