



34935 Flyover Ct. Bakersfield, CA 93308  
 Phone: (661) 588-8085 | Fax: (661) 588-8295

**INSTALL INSTRUCTIONS:**

**Cognito 2011-2019 GM  
 2500/3500 Steering  
 Stabilizer Relocation  
 Hardware Pack  
 SKU: 510-90935**



**PARTS LIST FOR SKU: 510-90935**

QTY.	PART #	DESCRIPTION
1	5050	Crush Sleeve, .75X.120X1.265
1	HARDWARE-M12-1.75X100	M12-1.75 x 100 Hex Cap Screw, Class 10.9 Zinc. DIN 931
2	HARDWARE-M12-FLATWASHER	Metric High-Strength Steel Flat Washer M12 Screw Size 24Mm Od 2.3Mm-2.7Mm Thick
1	HARDWARE-M12X1.75-LOCKNUT	Zinc-Plated Steel Nylon-Insert Hex Locknut Class 10 M12 Sz 1.75Mm Pitch 19Mm Width 12Mm H

**WARNING**

Please read this entire instruction sheet before beginning installation. Proper installation of these components requires a qualified mechanic. Always wear safety glasses when using power tools, and take appropriate precautions when working under a vehicle. If these instructions are not properly followed you may jeopardize your, and your passenger's safety, and severe frame, suspension or tire damage may also result from improper installation.

**INTRODUCTION**

If running a dealer-added or aftermarket steering stabilizer in conjunction with the Cognito Pitman and Idler Arm Support Kit, this kit is required to relocate the frame-end stabilizer mount. Otherwise, the PISK will contact the stabilizer, damaging the PISK hardware and stabilizer.

**REQUIREMENTS**



- Installation requires a qualified mechanic.
- Read instructions carefully and study the pictures before attempting installation.
- Secure and properly block vehicle prior to beginning installation.
- Always wear safety glasses when using power tools.

## TECHNICAL INFORMATION

- It is necessary to raise the vehicle to perform installation of these products. A hoist or installation bay is recommended. Always ensure the truck is properly supported before attempting installation as serious injury could occur.



## INSTALLATION

1. Remove the nut and bolt from the frame-side steering stabilizer mount and remove the stabilizer from between the frame tabs.
2. Install the supplied crush sleeve. See Figure 1.

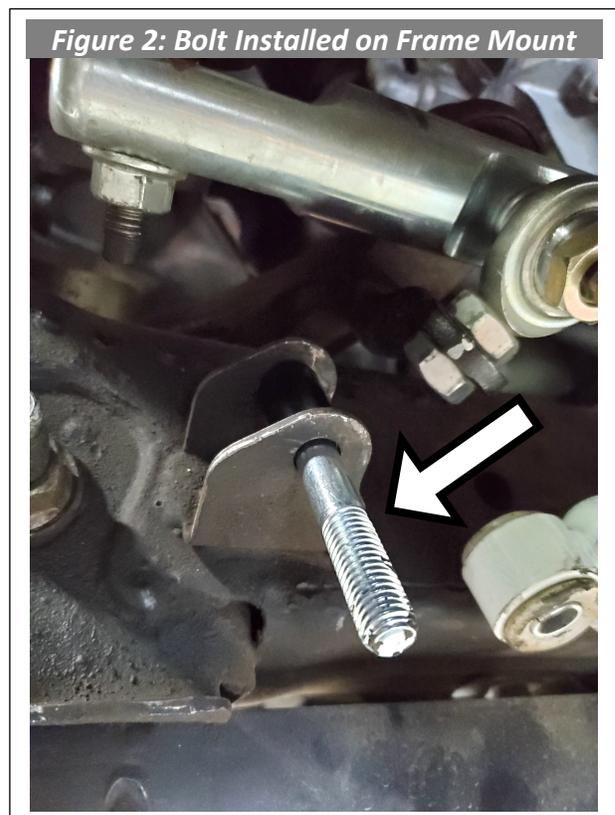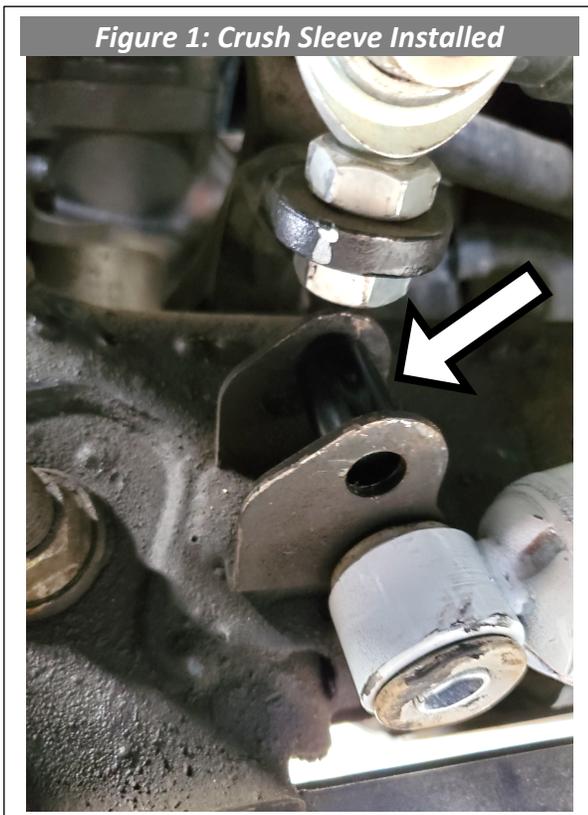

3. From the top, install the supplied 12mm bolt, with one of the supplied washers, through the frame mount and crush sleeve. See Figure 2.

4. Install the steering stabilizer onto the newly installed bolt. The stabilizer will now be mounted under the frame mounting tab. Install the supplied nut and washer. Torque to 60ft lbs. See Figure 3.

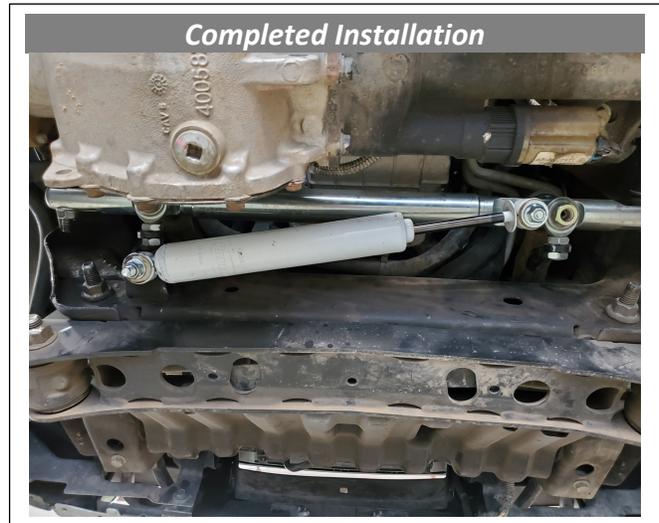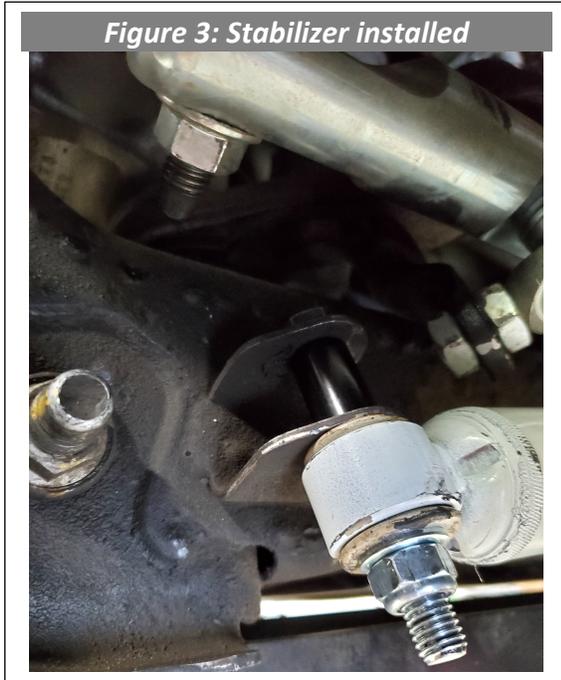

## WARRANTY / RETURN POLICY / SAFETY

### **Cognito Limited Lifetime Warranty**

Cognito Motorsports, Inc. hereinafter “Cognito,” warrants to the original retail purchaser, that its suspension products are free from workmanship and material defects for as long as the purchaser owns the vehicle on which the product(s) were originally installed. This warranty will be void if any modifications are made to the components, including alterations to the surface finish, i.e.; painting, powder coating, plating, and/or welding, or if they are improperly installed. Cognito truck suspension products are not designed nor intended to be installed on “competition” vehicles used in race applications, stunt or for exhibition purposes that are outside of the intended operating conditions specified by the manufacturer. Racing and competition are defined as any contests between two or more vehicles; or vehicles competing individually on off road circuits in timed events (whether or not such contests are for an award or prize).

This warranty does not include coverage for police, taxi, government or commercial vehicles, and the warranty does not cover Cognito products sold outside of the USA. Cognito’s obligations under this warranty are specified and applied at its sole discretion, and warranty coverage is limited to repair or replacement of the defective product(s). Any and all costs of removal, installation or reinstallation; freight charges, incidental or consequential damages associated with the covered products are expressly excluded from this warranty.

The following items are exempt from Cognito limited warranty coverage: bushings, bump stops, tie-rod ends (Heim joints) and limiting straps. These parts are “consumables” and designed to wear as a normal part of their duty cycle, therefore they are not considered defective when worn. The aforementioned products are warranted separately against defects in workmanship, for 60 days from the date of purchase. As a condition of warranty validation, respective Cognito suspension components must be installed as a complete system (not combined with non-Cognito hardware or ancillary parts). Any substitutions or omission of required components will void the warranty. Some minor cosmetic wear and imperfections may occur to parts during shipping, which is not covered under this warranty. This limited warranty does not apply to any components that have been subjected to collision damage, negligence, alteration, abuse, or misuse, and coverage does not extend to products manufactured by third-party companies. Cognito reserves the right to supersede, discontinue, or change the design, finish, part number and/or application of its parts when deemed necessary, without notice.

### **Return Policy**

Product returns will not be accepted without prior written approval from an authorized Cognito representative. All products being returned must be shipped via trackable, prepaid freight. Returned products are subject to a 25% percent restocking fee. The eligible return period for products purchased directly from Cognito is 30 days from the verified date when the product(s) were originally received by the purchaser.

### **Product Safety Advisory**

The installation of Cognito steering and suspension components will modify your vehicle’s original factory equipment and geometry, which may cause it to handle differently than a stock (unaltered) vehicle. Installation of these components is not intended to strengthen nor reinforce the vehicle’s frame, nor are they designed to increase rollover protection. It is necessary to periodically inspect all suspension and drive train components for proper attachment, torque specifications, operation, and for any potential unusual wear or damage. Installation of these parts will modify the height of the vehicle and may raise the center of gravity. Modifying vehicle height combined with off road operation may increase your vehicle’s susceptibility to rollover conditions, which may cause serious injury or death. Many states regulate allowable vehicle height modifications, and it is your responsibility to know and comply with the legal requirements specified by the laws where you reside. Modifications to your vehicle’s ride height may also affect the ride quality, driver input response, trackability and handling, and wear to your vehicle’s suspension components and tires.