




ReadyLIFT® (Part# 66-7816A) Instructions
Torsion Bar Unloading Tool



NOTE: GREASE BEFORE USE! Completely remove the threaded bolt and thoroughly grease the inside threads of the tool with high quality Black or Red Molybdenum lubricant. Repeat as needed, and remove all metal shavings from the tool threads before re-greasing. Flange nuts must be seated properly in cross-shaft to prevent damage to tool.

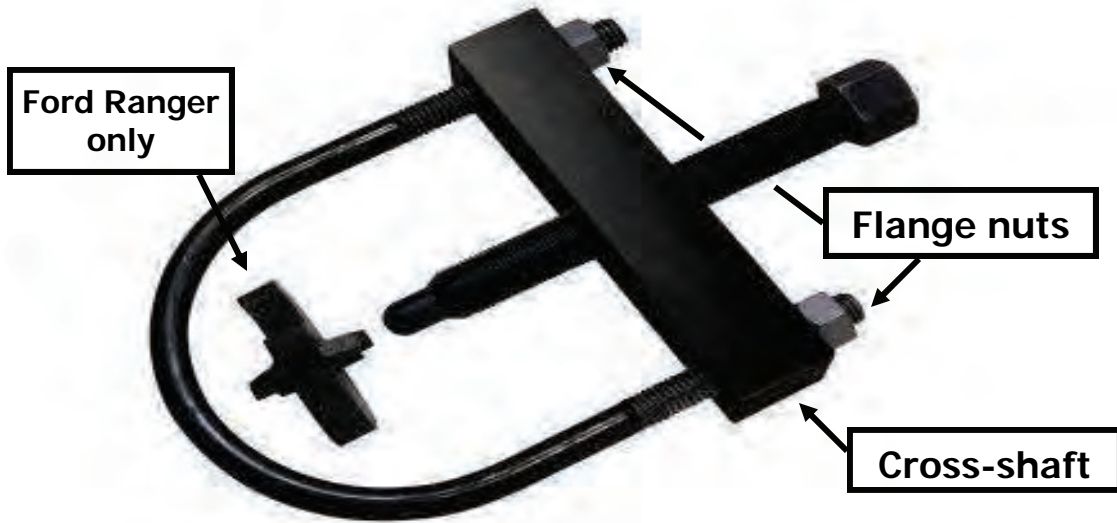

ReadyLIFT Suspension Inc.
7490 Commercial Way, Henderson, NV 89011
Phone (702)410-2300 Fax (702)410-2794