



advanced FLOW engineering™  
P.O. Box 1719  
Corona, CA 92878  
Support: 951-493-7100  
aFePower.com

# Intake Kit Installation Instructions: Nissan Frontier/ Pathfinder/Xterra V6-4.0L


<b>Kit Part #</b>	51/54/75-10492 Magnum FORCE Stage-2		<b>Tools Required:</b>	<b>Parts List:</b>		2 Spacer nylon	
<b>Make:</b>	Nissan		5/16" nut driver		1 Air Filter (p/n# 24-91034 or 21-90047)		1 Gasket MAF sensor
<b>Model</b>	<b>Year</b>	<b>Engine</b>	Slotted screwdriver		1 Intake tube		1 Trim seal 3/4" Bulb (26.5")
Frontier	'05-'16	V6-4.0L	10mm socket or wrench		1 Intake housing		1 Coupler 3.5"x4"
Pathfinder	'05-'12	V6-4.0L	Ratchet and extension		2 Screw M6x1x25		2 Clamps #060
Xterra	'05-'15	V6-4.0L			2 M6 washer		
					2 Washer wavy M6		
					2 M6 nut		
					2 Phillips screw #8-32		



**Step 1**  
Complete kit. Please verify all components are present prior to beginning installation.



**Step 2**  
Complete stock intake.

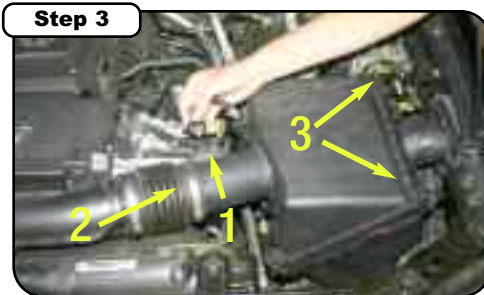

**Step 3**  
Disconnect the MAF sensor (1). Loosen the hose clamp on the air box (2), and unclip the upper portion of the air box (3).



**Step 4**  
Remove the upper portion of the air box and the factory air filter.



**Step 5**  
Remove the 10mm bolt on the side of the air box set aside for later use. Lift the lower air box up and out of the engine bay.



**Step 6**  
Transfer the rubber vibration mounts located on the bottom of the air box over to the new housing.



**Step 7**  
Place the rubber trim seal along the edge of the housing. Lower the housing into the engine bay secure housing with the bolt removed in step 5.



**Step 8**  
Place the coupler on to the intake tube. Do not tighten clamps at this time.



**Step 9**  
Slide the intake tube assembly into the housing. Secure the tube to the housing with the supplied M6 hardware. Tighten and secure the hose clamp.



**Step 10**  
Carefully remove the MAF sensor from the OEM air box lid.



**Step 11**  
Transfer the MAF sensor to the aFe intake tube. Secure with the supplied gaskets, spacers, and screws. Make sure you pay attention to the direction of the arrow on the MAF sensor.



**Step 12**  
Install the pre oiled air filter. Do not use any grease or oil. Secure with the provided clamp.



**Step 13**  
Your installation is now complete. Make sure you tighten all clamps and check all electrical connections. Re check periodically.

**Retighten all connections after approximately 100-200 miles. Place enclosed CARB EO sticker on or near the device on a smooth, clean surface. EO identification label is required to pass the smog inspection.**