
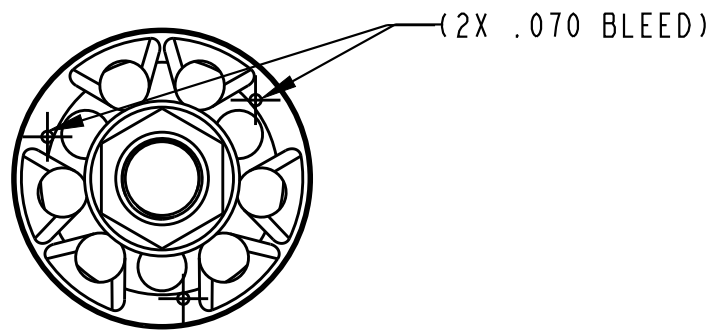


— PROPRIETARY —
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY
INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO
OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	PRODUCTION RELEASE	09/30/24	MG





002-05-020
Bearing: (T) External
[.304 W X .050 TH X 1.832 OD] DU Tongue

029-18-029
Seals:O-Ring [(029) .070 C.S. X 1.489 ID]
Viton, 90 Dur

222-01-483
Piston: Damping [Ø 1.834 Bore, 9 Hole, No Bleed]
Al 6061, Clear Ano III

018-00-040
Fastener, Standard: Nut, Lock [1/2-20 X 0.448 TLG]
Zinc Plate


IMPORTANT:
SHARP EDGE
TOWARDS PISTON

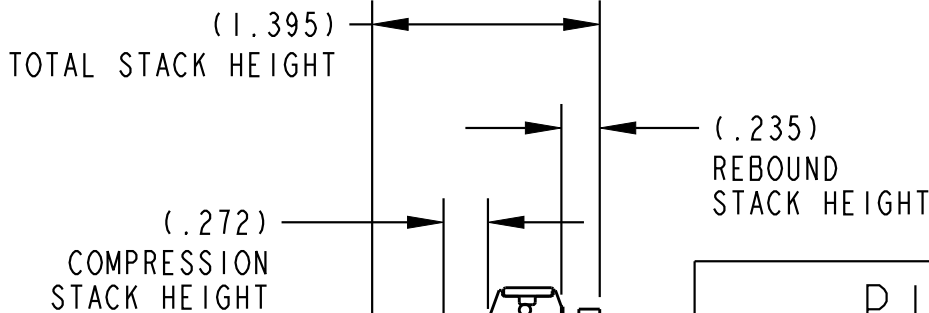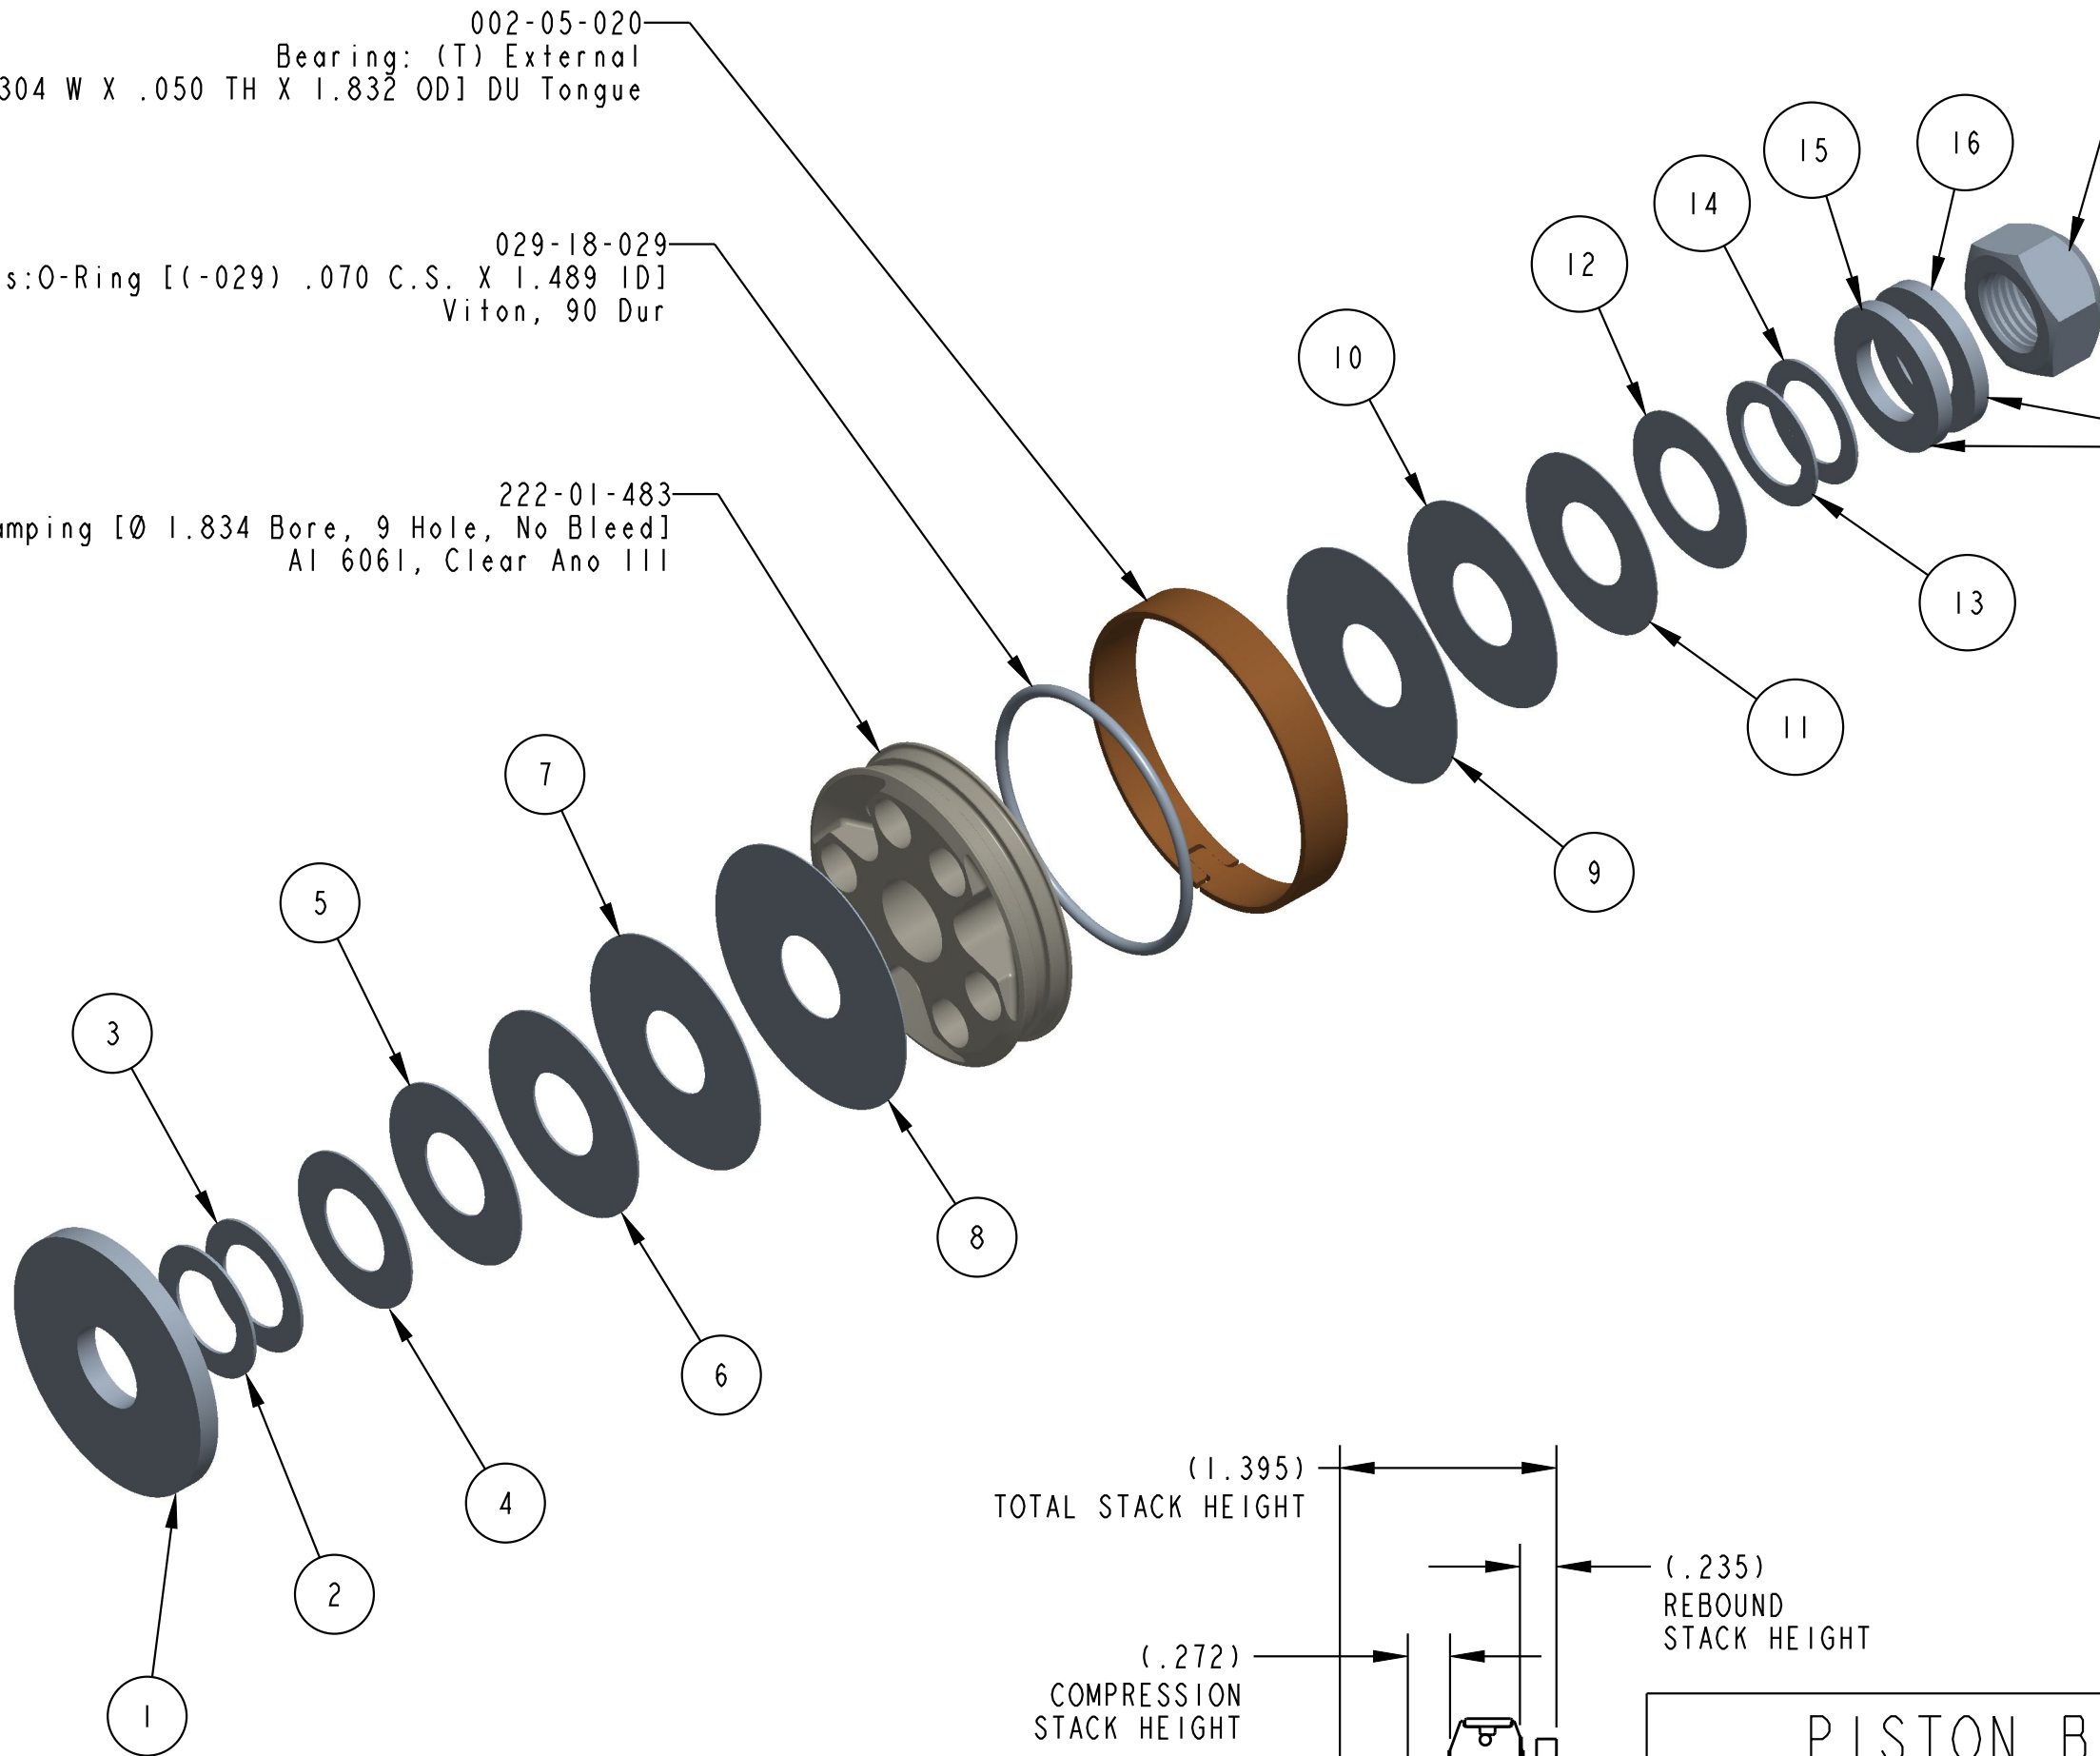

COMPRESSION VALVING		
ITEM	FOX PART #	VALVE OD X THK
1	050-00-001-A	1.570 X .128 (TO)
2	041-20-080-A	.800 X .020
3	041-20-080-A	.800 X .020
4	041-15-095-A	.950 X .015
5	041-15-110-A	1.100 X .015
6	041-15-125-A	1.250 X .015
7	041-12-142-A	1.425 X .012
8	041-10-160-A	1.600 X .010

PISTON POSITION		
REBOUND VALVING		
ITEM	FOX PART #	VALVE OD X THK
9	041-08-142-A	1.425 X .008
10	041-08-125-A	1.250 X .008
11	041-08-110-A	1.100 X .008
12	041-08-095-A	.950 X .008
13	041-20-075-A	.750 X .020
14	041-20-075-A	.750 X .020
15	050-01-018-A	.875 X .100 (BU)
16	050-01-018-A	.875 X .100 (BU)

PISTON BLEED SPEC
DRILLED ON LINE 2X Ø.070"

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] CLOCKING OF FEATURES IS NOT IMPORTANT		PER ASME Y14.5-2018		FOX FACTORY, INC.	
DEV PROJECT #:		APPROVALS		TITLE Valving Assembly: 2.0 Factory Series Tuned Combination 070	
TOLERANCES ARE:		DATE			
DECIMALS	ANGLES	DWN. BY	CHK. BY	SIZE	DWG. NO.
.XX [.X] ±.01 [0.25]	± 1°	M. GUTIERREZ	09/30/24		
.XXX [.XX] ±.005 [0.13]		ENG.	M. GUTIERREZ	C	807-24-070
THIRD ANGLE PROJECTION		MFG.			
		QC.		PLOT SCALE: 1:1.176	
PROTO / MAKE FROM PN: XXX-XX-XXX				SHEET: 1 OF 1	

NOTES:
1. APPLICATION: CLASS 1/2-1600 SPEC FRONT 2.0 EXBP