




# Jeep JT 3.5" Spring Lift

[www.TERAFLEX.com](http://www.TERAFLEX.com)

# 1365000

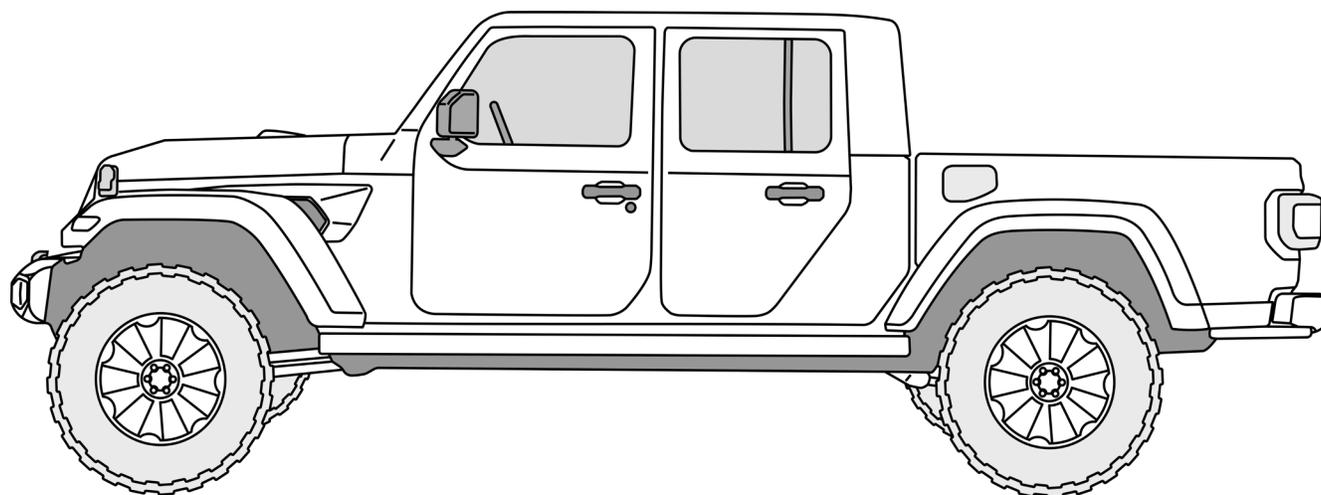

## Important Notes:

Prior to beginning this install, or any installation, read the instructions thoroughly to familiarize yourself with the required steps. Evaluate if you are experienced and capable to personally perform these modifications. A factory service manual should be used in conjunction with these installation instructions.

This product will change the highway handling characteristics of your vehicle, exercise caution. After altering the suspension it is always advisable to have an alignment done by a competent 4 wheel drive shop or by an alignment shop that is experienced with lifted 4 wheel drive vehicles.





Refer to the parts list to ensure that all necessary components and hardware has been included. If any parts are missing please contact your local TeraFlex dealer for assistance.

## Tools Needed:

- |  |                           |
|--|---------------------------|
| - Metric Sockets and Open End Wrenches | - Factory Service Manual  |
| - Torque Wrench                        | - General Mechanics Tools |

## Maintenance Note:

After the first 300 miles and every 3,000 miles after that, re-torque all the suspension components and bolts.

		Description	Item #	Base Lift
Spring Box Components		1 Front Spring	02-21-401-400-1	2
		2 Rear Spring	02-23-401-150-1	2
		3 Front Bumpstops	12-01-109-200	2
		4 Front Bumpstop Spacer	12-02-109-050	4
		5 Rear Top Bumpstop Spacers 1.5"	12-01-309-150	2
		6 Rear Top Bumpstop Spacer Rings .5"	12-01-309-050	2
		7 Rear Bumpstop Spacers	12-02-309-050	2
		8 Front Track Bar Bracket	1953250	1
		9 Front Swaybar link 11.50"	21-01-001-115	2
		10 Rear Swaybar Link 13.0"	21-01-001-130	2
		11 M10 x 1.5 x 50mm Hex Flange Bolt	45-02-003-025	2
		12 Flat Washer	45-10-003-003	2
		13 M10 x 1.5 Fuji Nut	23-07-03-001	4
		14 M10 x 1.5 x 100mm Flat Socket Cap Screw	45-04-003-001	2
		15 M8 x 1.25mm Yellow Zinc Fuji Nut	23-07-03-002	4
		16 M8 x 1.25 x 30mm Hex Flange Bolt	45-02-003-016	4
		17 Rear Upper Bumpstop Spacer	56-08-05-044-1-1	2
		18 Nut Wrench Tool	600271	1

**\*NOTES\***

**\*FOR ALPINE & ALPINE IR CONTROL ARM KITS: Refer to Instruction #999373 before continuing.**




**-CONTROL ARMS WITH  BUSHINGS can be torqued with the Jeep raised in the air.**

**-CONTROL ARMS WITH  BUSHINGS Will need to leave the control arms loose until the end of the installation.**



**\*FOR SPEEDBUMP KITS: Refer to Instruction #999370 before continuing.**

**\*FOR FRONT TRACK BAR: Refer to Instruction 999340**


**\*FOR FRONT QUICK DISCONNECTS: Refer to Instruction 999372**

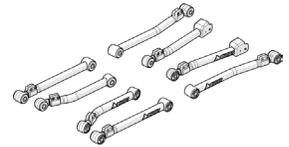

**FRONT INSTALLATION  
LIFT AND SUPPORT AT FRAME**

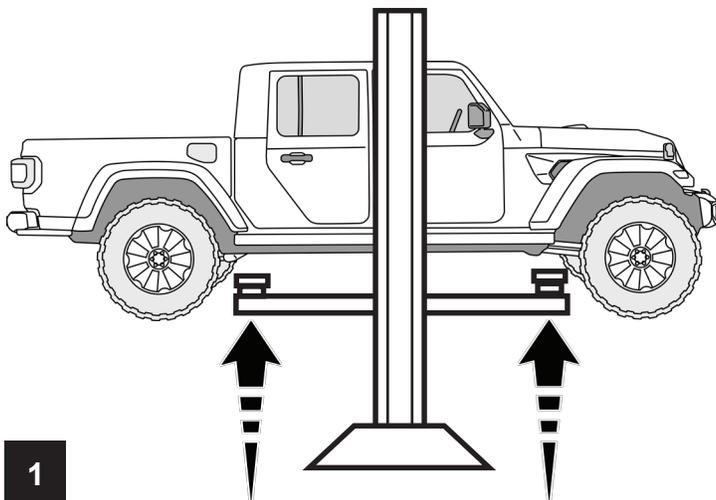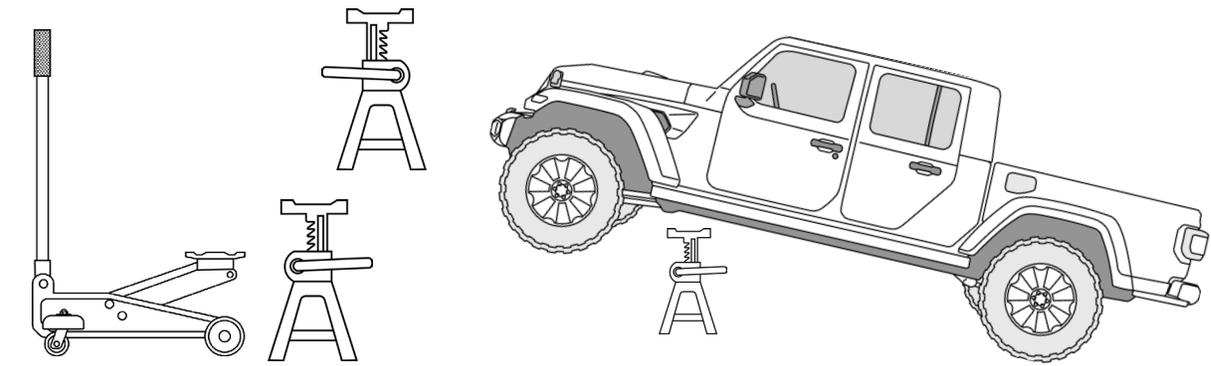


**1**

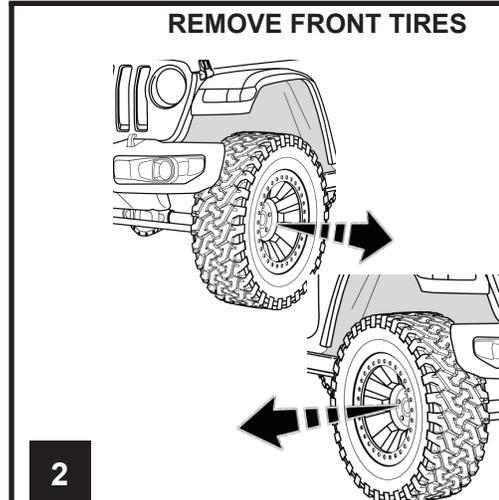



**2**

**REMOVE FRONT TIRES**


### SUPPORT FRONT AXLE

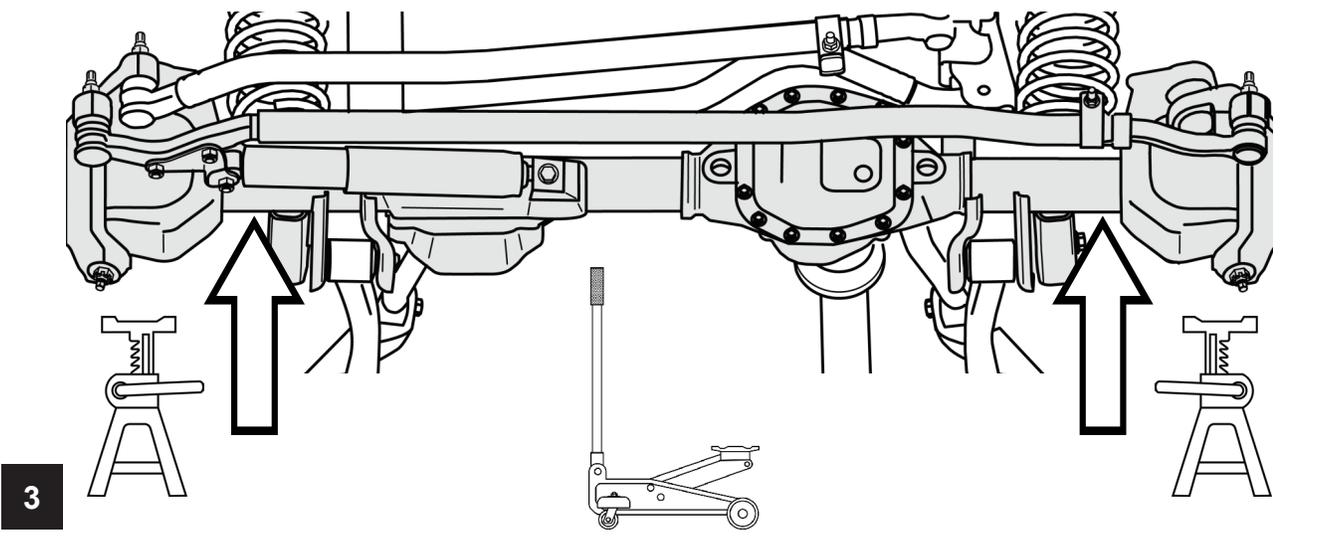


### REMOVE SWAY BAR LINKS & REMOVE TRACK BAR BOLT AT AXLE

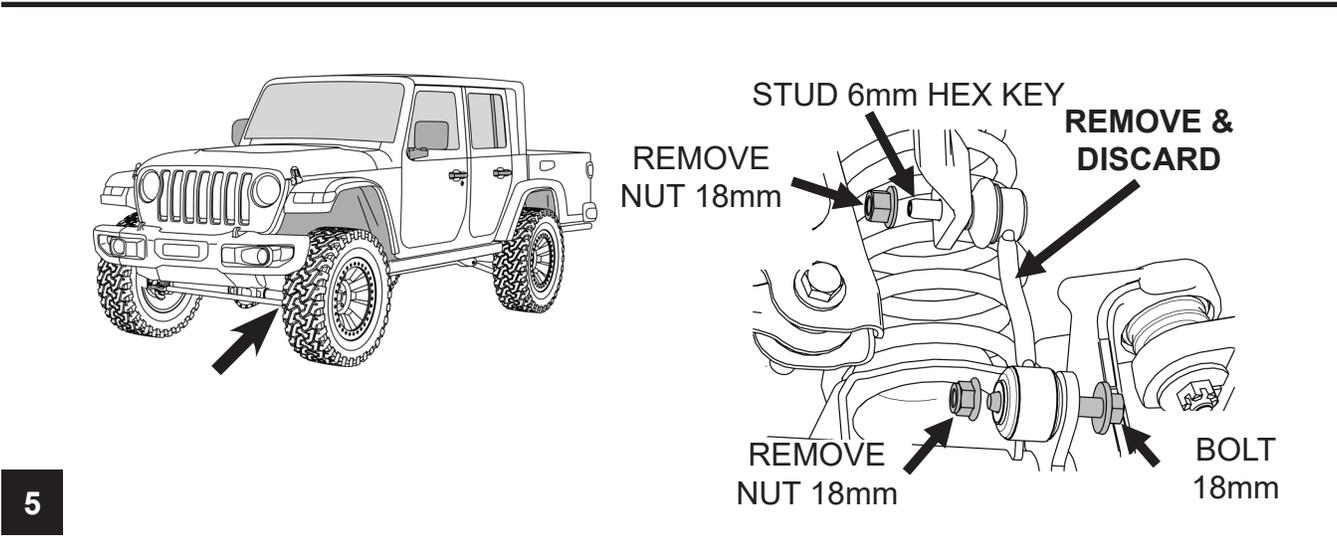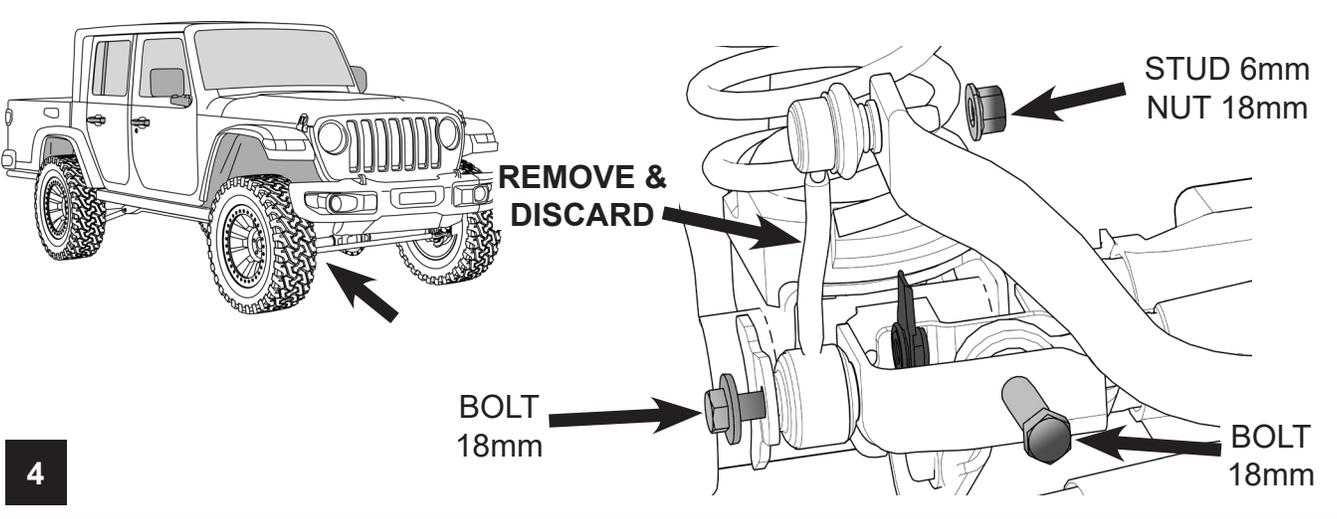


**REMOVE AND DISCARD BRAKE LINE BRACKETS FROM LOWER CONTROL ARMS**

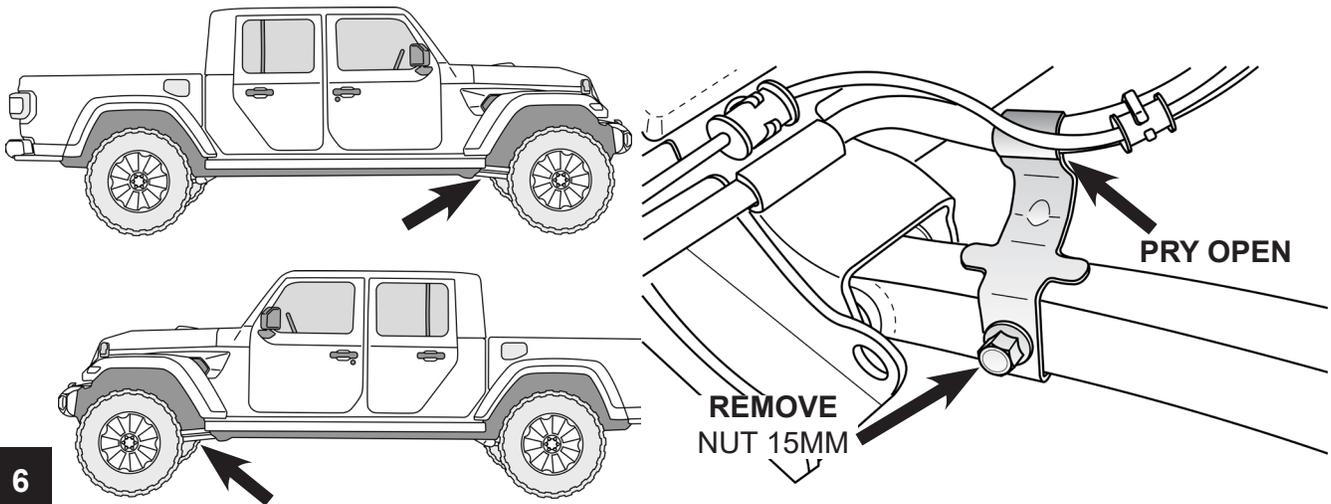


**DISCONNECT ACTUATORS AND VENT HOSE AT THE FRONT AXLE**

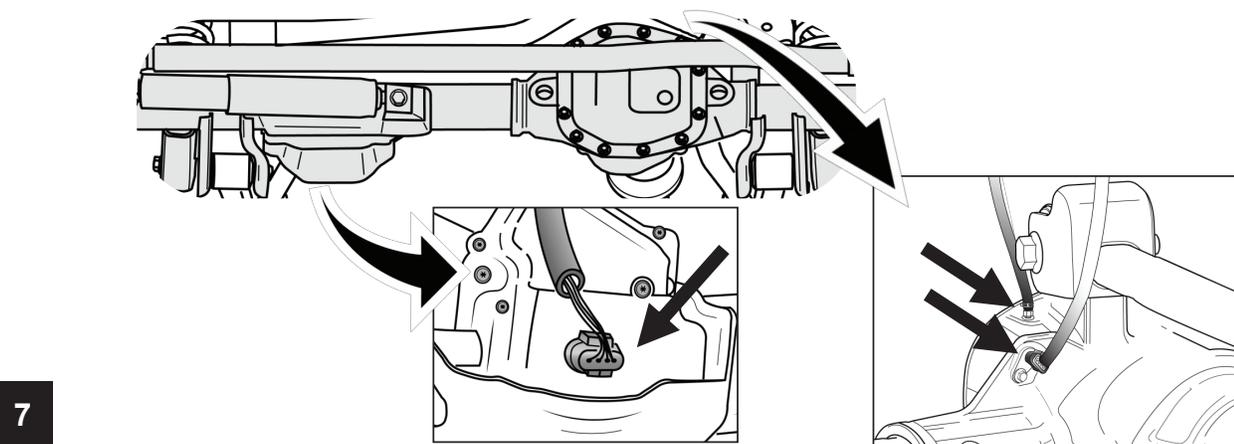

**LOOSEN FRONT CONTROL ARM BOLTS  
DO NOT REMOVE THE CONTROL ARM BOLTS**

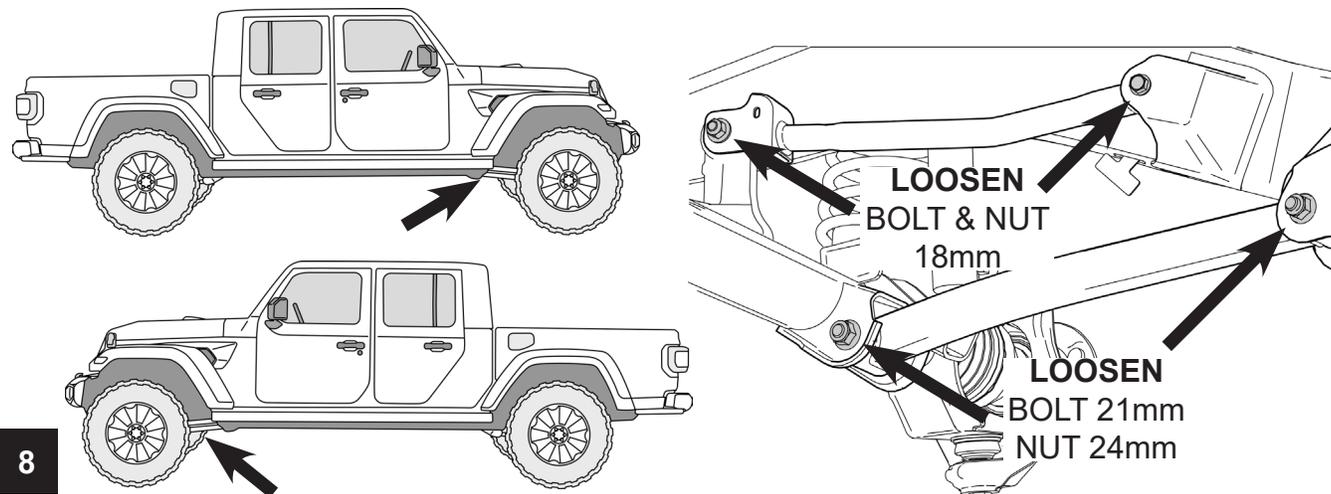

### REMOVE FRONT SHOCKS

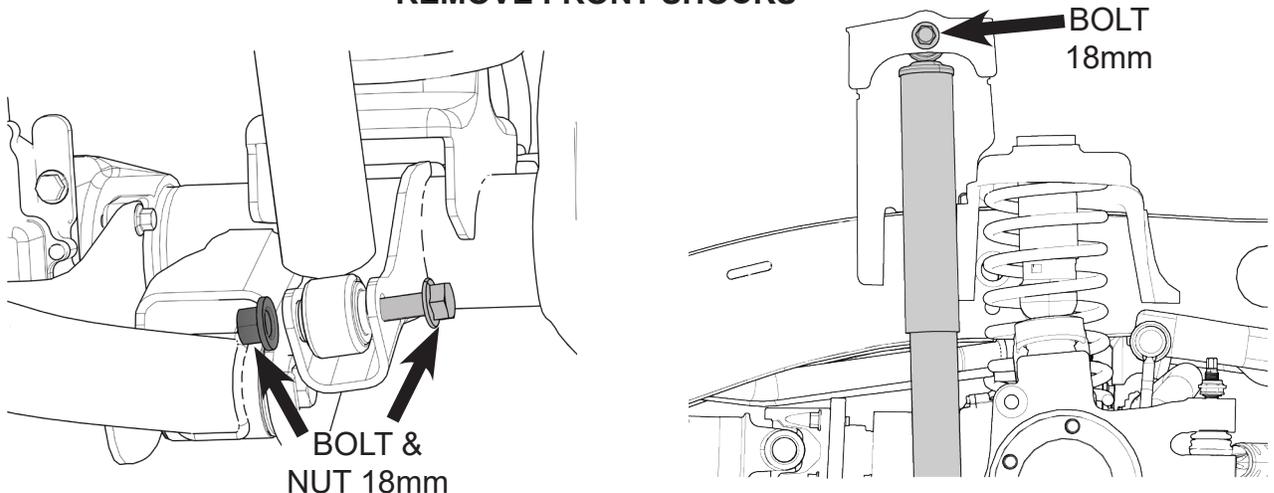


9

BOLT &  
NUT 18mm

BOLT  
18mm

### LOWER AXLE AND REMOVE FRONT SPRINGS

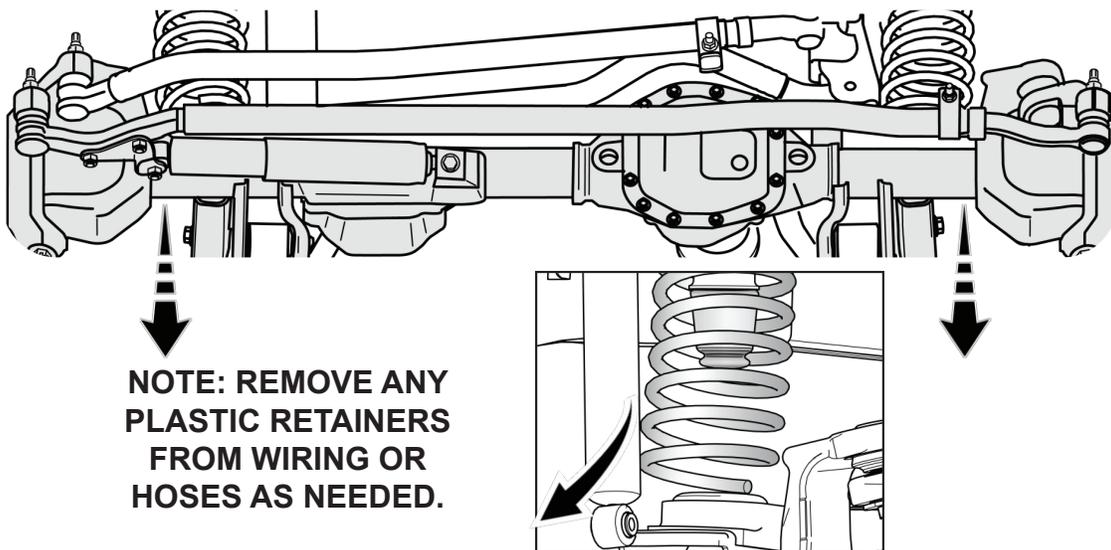


NOTE: REMOVE ANY  
PLASTIC RETAINERS  
FROM WIRING OR  
HOSES AS NEEDED.

10

### INSTALL BUMPSTOP INTO NEW FRONT SPRING



**NOTE:**

- FOR FALCON JOUNCE BUMPER KITS: Refer to instruction #999364
- FOR SPEEDBUMP KITS: Refer to Instruction #999370 before continuing.

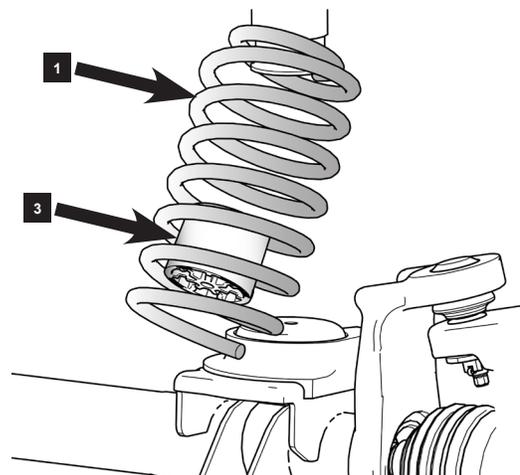


11

**INSTALL THE BUMPSTOP ONTO THE AXLE AND FULLY SEAT THE SPRINGS INTO THE LOWER SPRING PERCH**

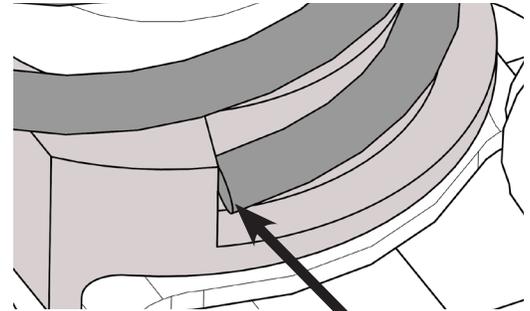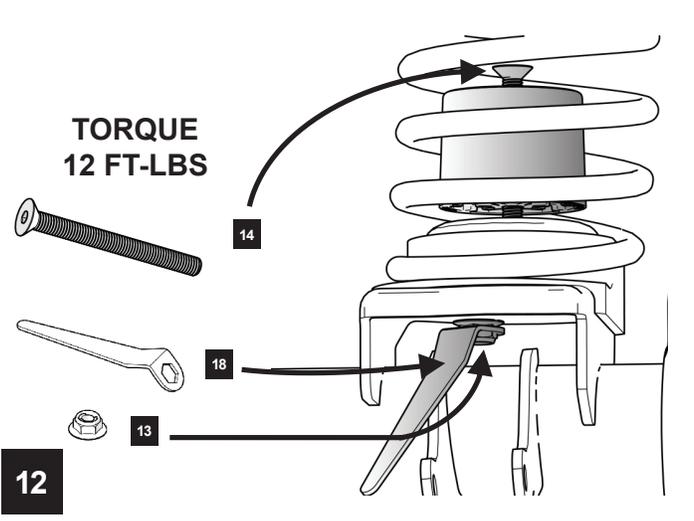

**MAKE SURE SPRING IS FULLY SEATED ON PERCH**

**RAISE AXLE & INSTALL SHOCKS**

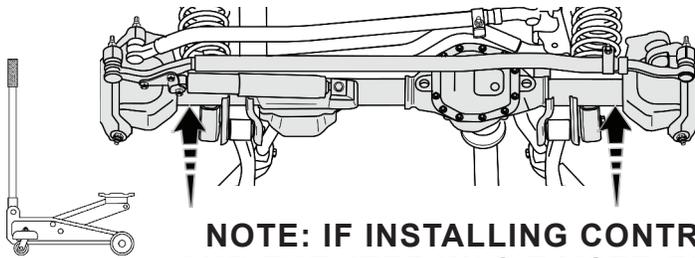


**FOR INSTALLING FALCON SHOCKS**  
(REFER TO QUICK START GUIDE INSIDE FALCON SHOCK BOX)

**NOTE: IF INSTALLING CONTROL ARMS WITH ALPINE BUSHINGS, AND THE JEEP WAS RAISED FOR INSTALLATION, LOWER THE JEEP TO THE GROUND AND FINISH INSTALLATION BY TORQUING THE CONTROL ARM BOLTS.**

**NOTE: IF INSTALLING CONTROL ARMS WITH ALPINE IR BUSHINGS THE CONTROL ARMS CAN BE TORQUED WITH THE JEEP RAISED IN THE AIR. REFER TO PAGE 13 FOR TORQUE SETTINGS**

13


**(OPTIONAL) INSTALL BRAKE LINE ANCHORS**

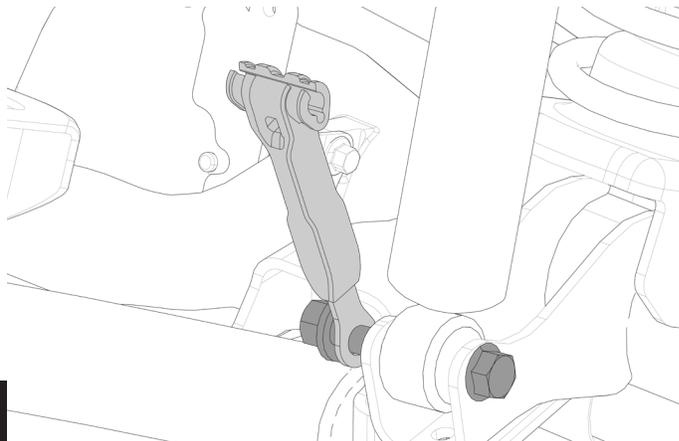

**REFER TO THE INSTRUCTIONS ON THE BACK OF THE BRAKE LINE ANCHOR KIT BOX FOR PROPER INSTALLATION.**


14

**RECONNECT CONNECTIONS TO FRONT AXLE**

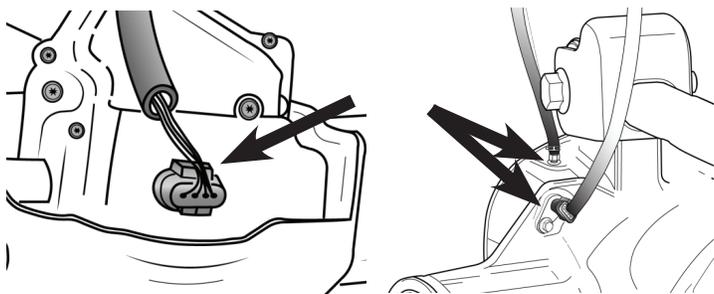

**RECONNECT PLASTIC RETAINERS FROM WIRING OR HOSES AS NEEDED.**

**15**

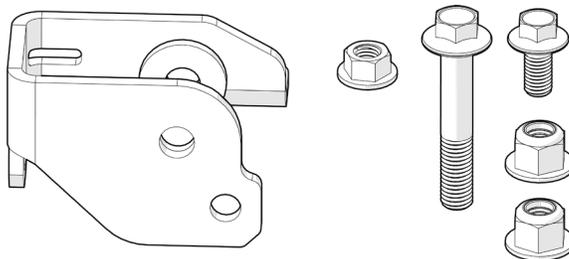


**NOTE: REFER TO INSTRUCTION 999341 FOR INSTALLING FRONT TRACK BAR BRACKET**

**NOTE: IT IS EASIEST TO REINSTALL TRACK BAR AFTER JEEP IS BACK ON THE GROUND**


**16**

**INSTALL NEW SWAY BAR LINKS**

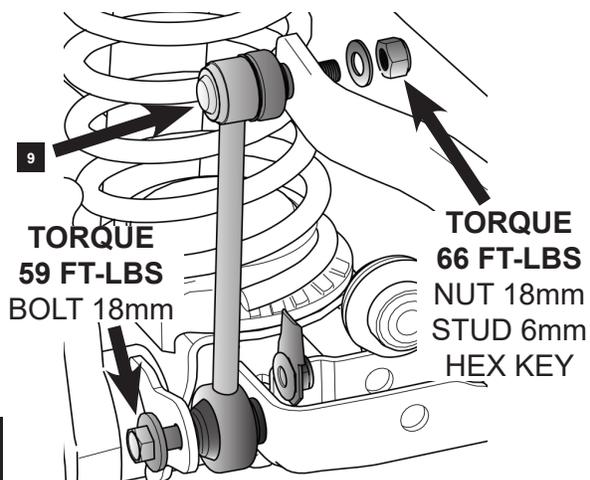


**17**

**NOTE: IF INSTALLING QUICK DISCONNECTS, REFER TO INSTRUCTIONS #999372**

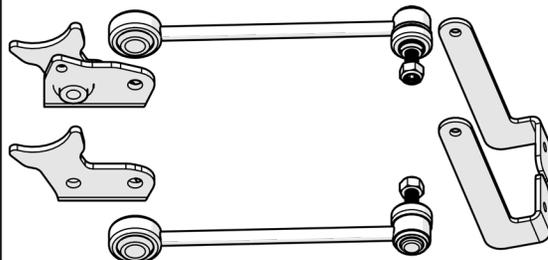




**NOTE: IF ONLY FRONT OF JEEP WAS LIFTED, REINSTALL TIRES AND LOWER JEEP BACK TO THE GROUND BEFORE LIFTING THE REAR**

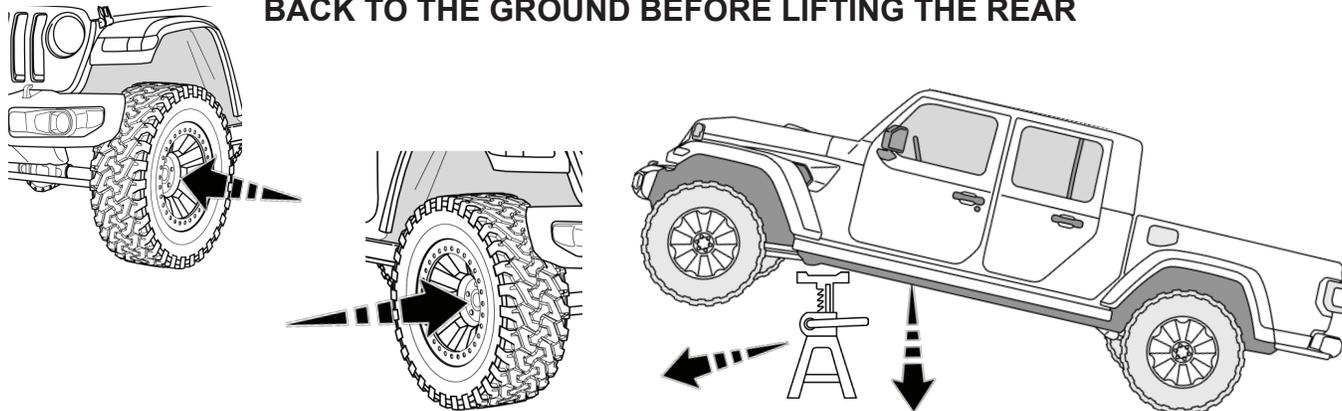


**18**

**\*TORQUE THE FRONT TIRES TO 130 FT LBS\***


### REAR INSTALLATION LIFT AND SUPPORT AT FRAME

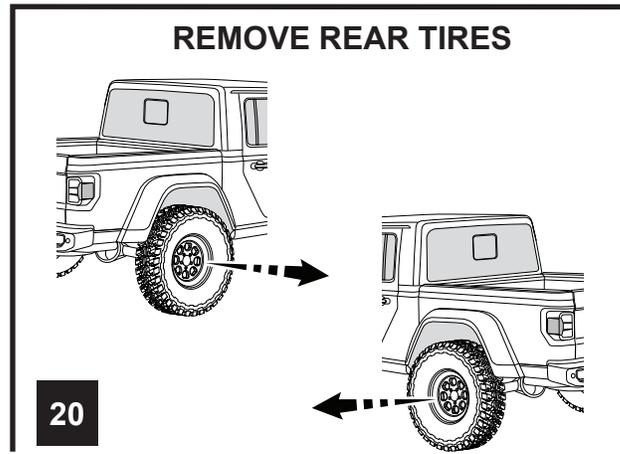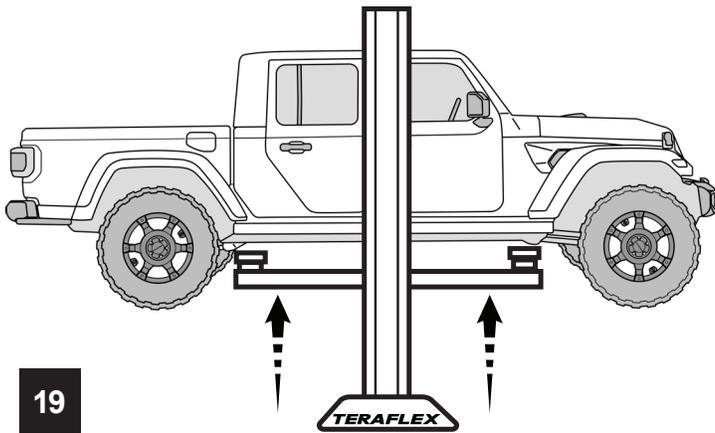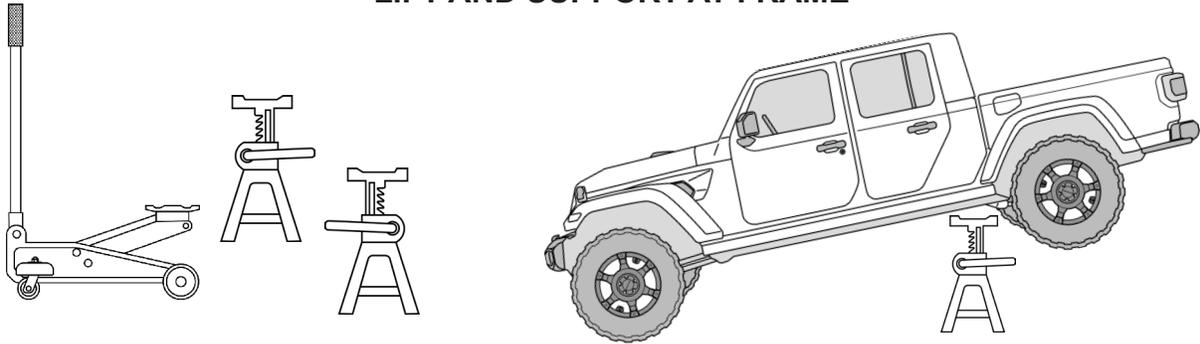


### SUPPORT REAR AXLE

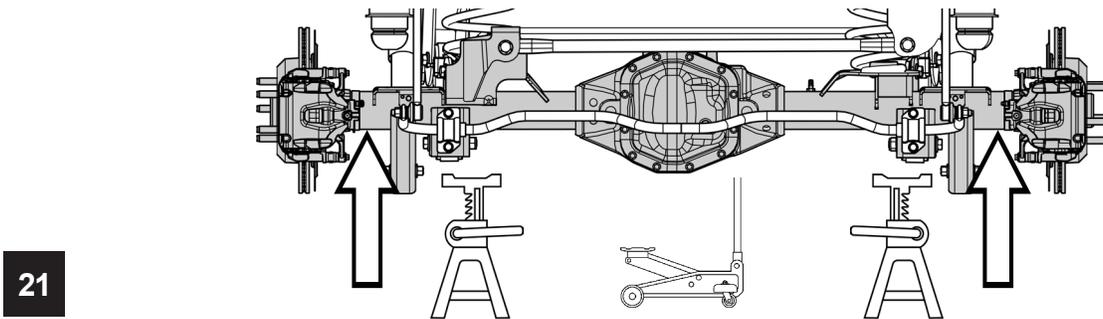

### REMOVE SWAY BAR LINKS

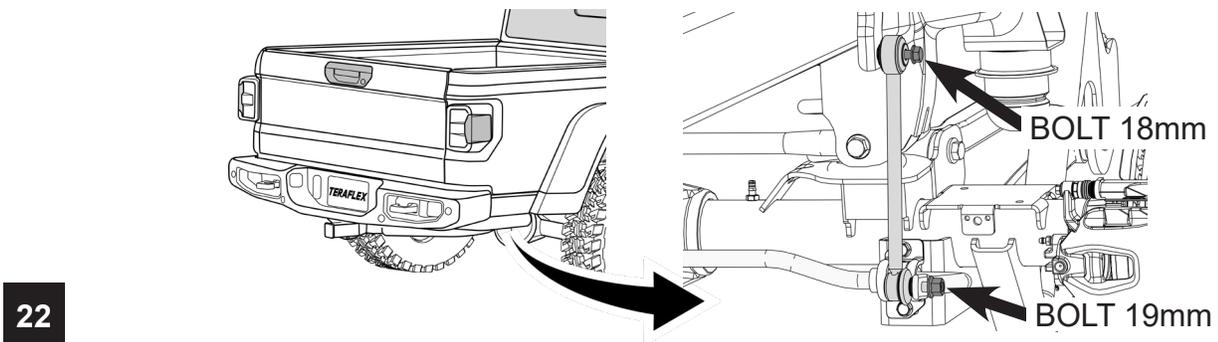


**TEMPORARILY REMOVE BRAKE LINE BRACKETS FROM BOTH SIDES OF THE FRAME**

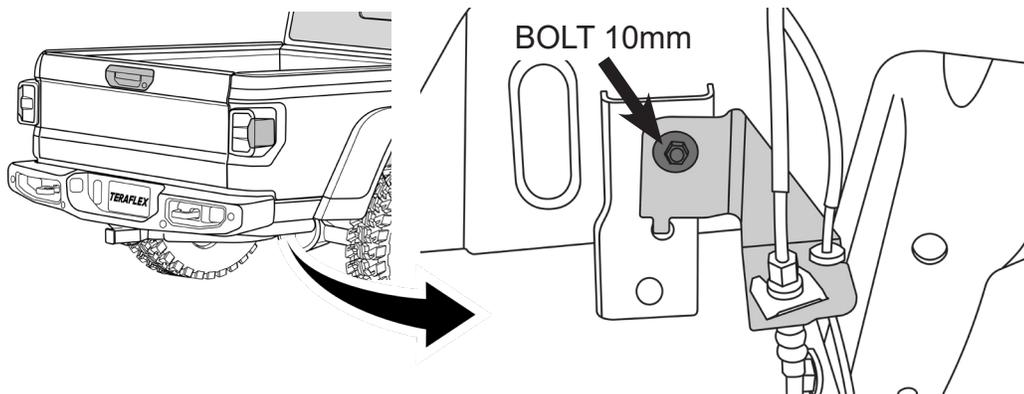


23

**REMOVE THE TRACK BAR FROM THE AXLE**

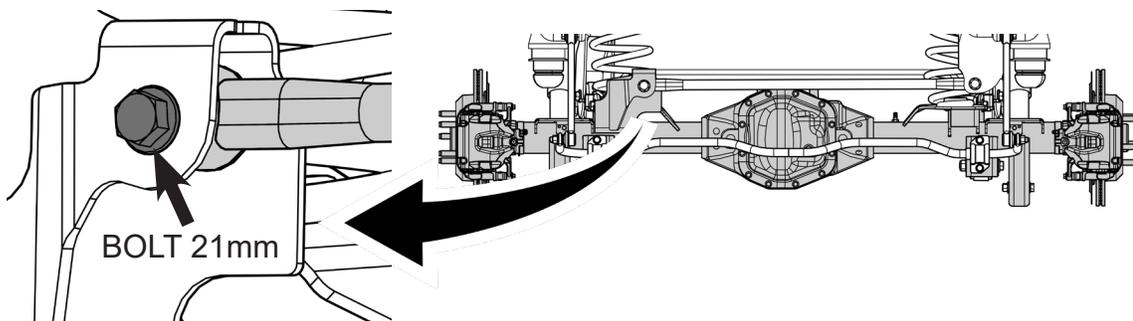


24

**LOOSEN BUT DO NOT REMOVE THE CONTROL ARM BOLTS**

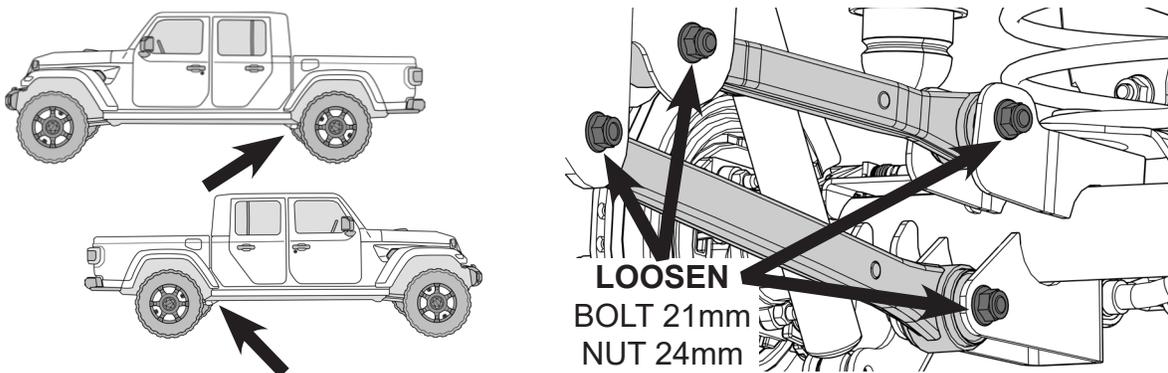



25

**REMOVE THE REAR SHOCKS**

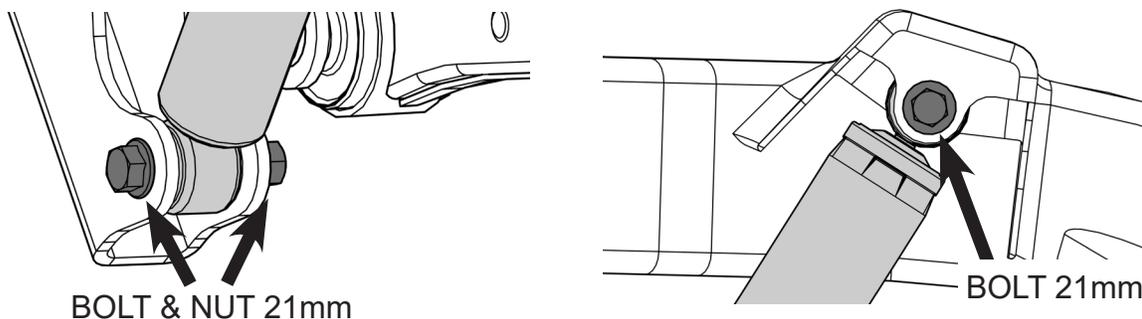

26



### LOWER AXLE TO REMOVE REAR SPRINGS

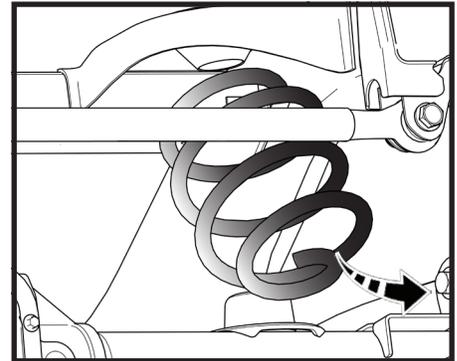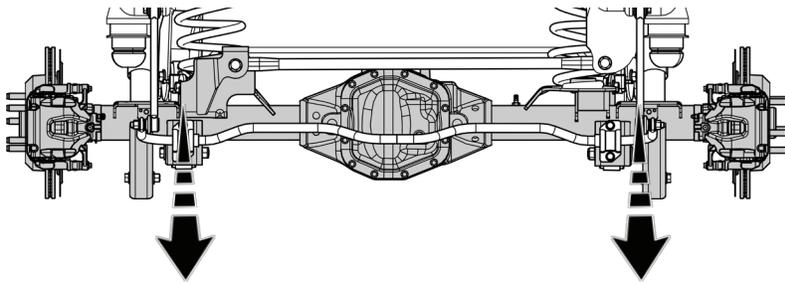

27

**NOTE: REMOVE ANY PLASTIC RETAINERS FROM WIRING OR HOSES AS NEEDED.**


### INSTALL THE NEW REAR SPRINGS

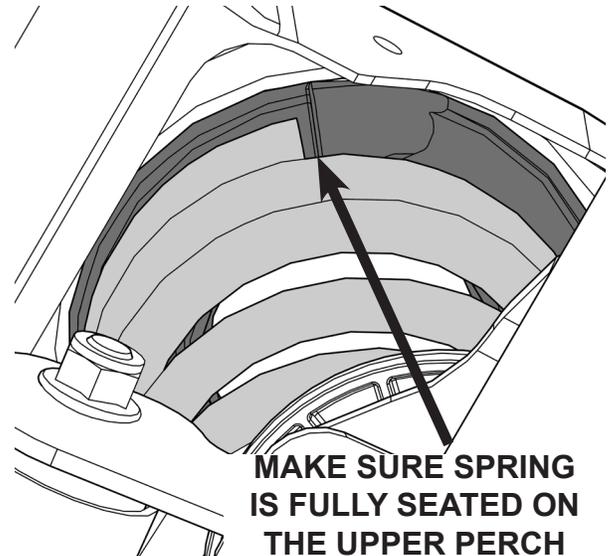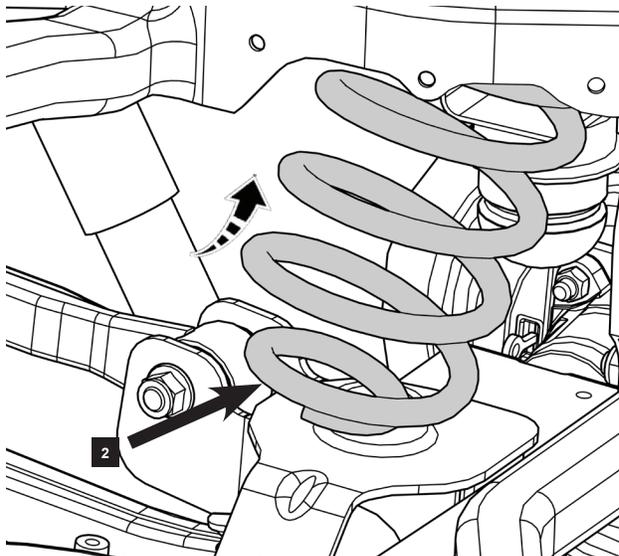

28


**MAKE SURE SPRING IS FULLY SEATED ON THE UPPER PERCH**

### RAISE THE REAR AXLE AND INSTALL NEW SHOCKS

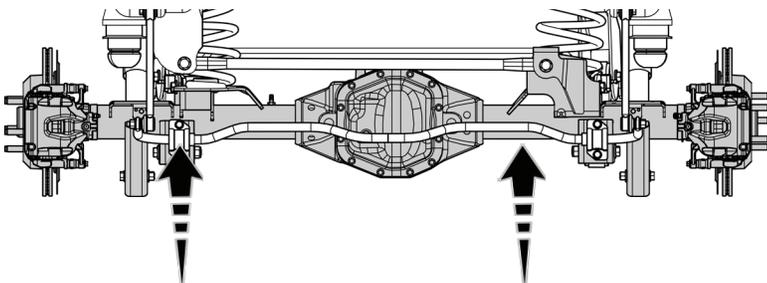

#### INSTALLING FALCON SHOCKS

(REFER TO QUICK START GUIDE INSIDE FALCON SHOCK BOX)




**NOTE: IF INSTALLING CONTROL ARMS WITH ALPINE BUSHINGS, AND THE JEEP WAS RAISED FOR INSTALLATION, LOWER THE JEEP TO THE GROUND AND FINISH INSTALLATION BY TORQUING THE CONTROL ARM BOLTS.**

29


**NOTE: IF INSTALLING CONTROL ARMS WITH *ALPINE IR BUSHINGS* THE CONTROL ARMS CAN BE TORQUED WITH THE JEEP RAISED IN THE AIR. REFER TO PAGE 14 FOR TORQUE SETTINGS**

### INSTALL THE NEW REAR SWAY BAR ENDLINKS

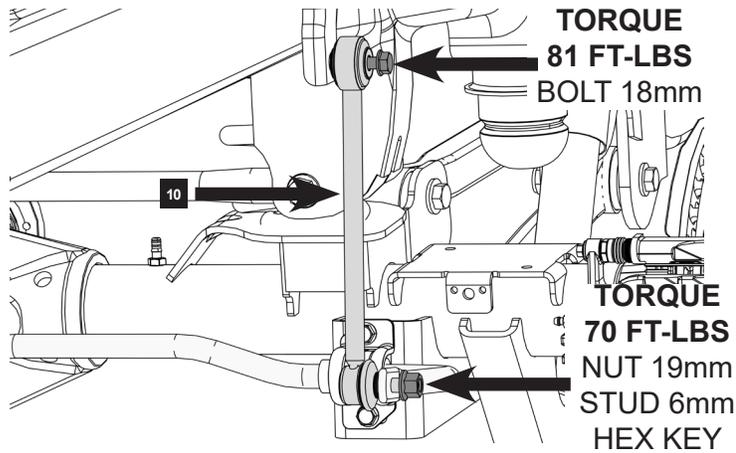


30

### INSTALL THE REAR BUMPSTOP SPACERS

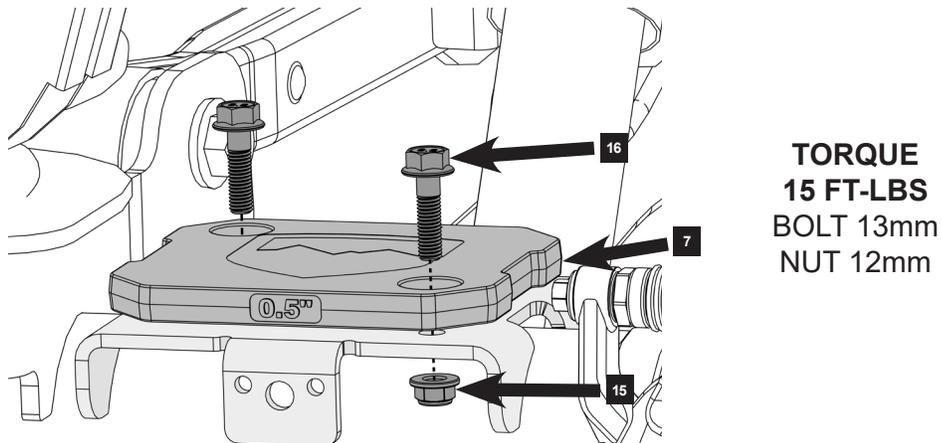

31


### INSTALL UPPER BUMPSTOP SPACER

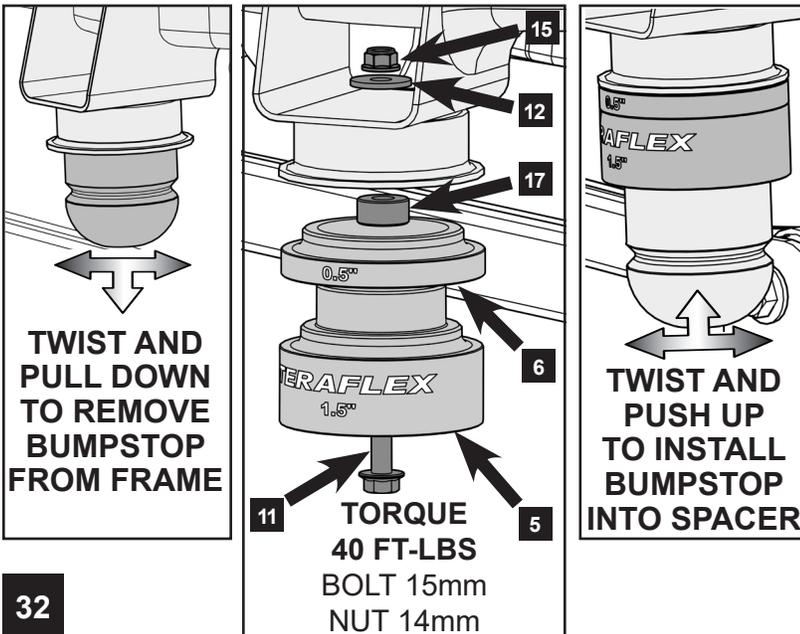

32


### REINSTALL THE BRAKE LINE BRACKETS TO THE FRAME

**TORQUE 6 FT LBS**  
BOLT 10mm

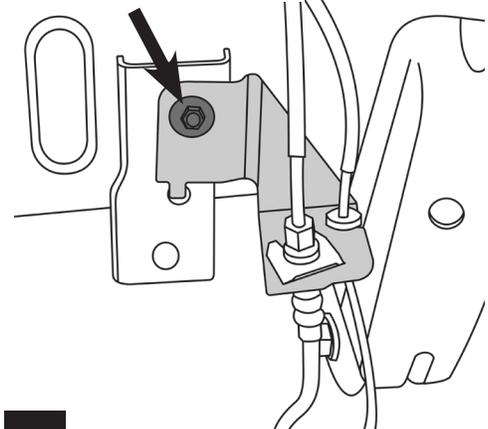

33

**REINSTALL TIRES AND LOWER TO THE GROUND**

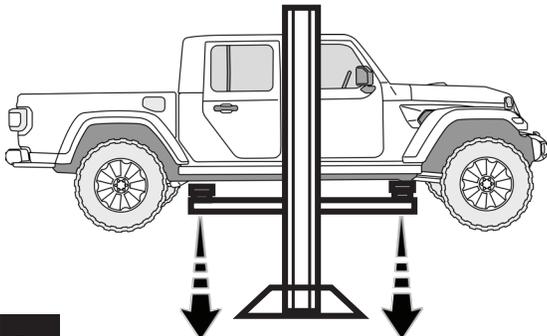


**34**


**TORQUE TO 130 FT LBS**

**REINSTALL TRACK BARS AND TORQUE TO THE FOLLOWING SPECS**

**TORQUE REAR**  
BOLT 21mm  
100 Ft Lbs

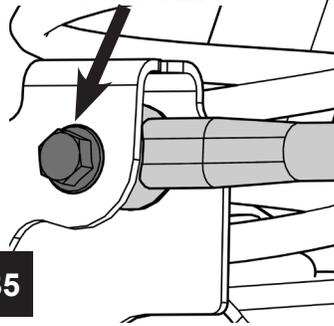

**35**

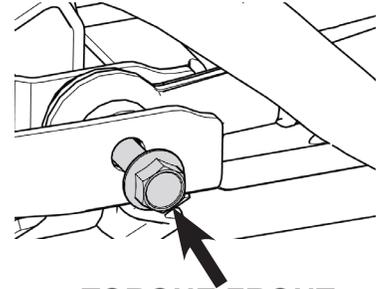


**TORQUE FRONT**  
BOLT 18mm  
52 Ft Lbs + 155°  
(REF: 230-250 Ft Lbs)

**REAR**

**TORQUE CONTROL ARMS**

**TORQUE**  
111 Ft Lbs + 95°  
(REF: 240-260 Ft Lbs)

**TORQUE**  
111 Ft Lbs + 65°  
(REF: 180-200 Ft Lbs)

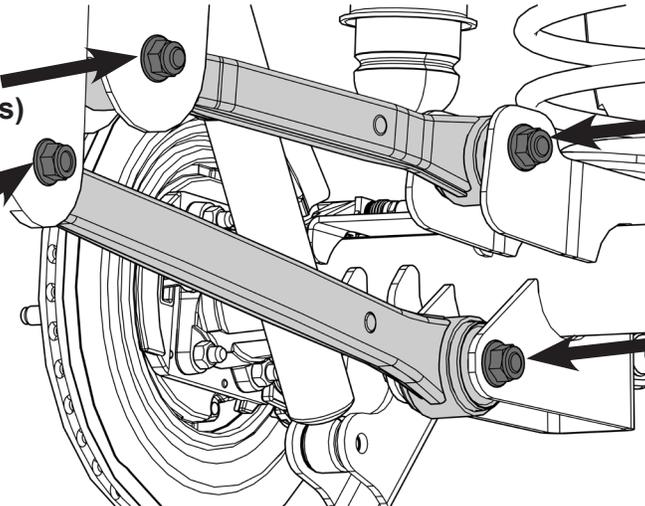

**TORQUE**  
111 Ft Lbs + 90°  
(REF: 250-270 Ft Lbs)


**TORQUE**  
111 Ft Lbs + 60°  
(REF: 200-220 Ft Lbs)

**BOLTS 21mm**  
**NUTS 24mm**

**FRONT**

**TORQUE 18mm**  
37 Ft Lbs + 135°  
(REF: 100-120 Ft Lbs)

**TORQUE 18mm**  
41 Ft Lbs + 185°  
(REF: 140-160 Ft Lbs)

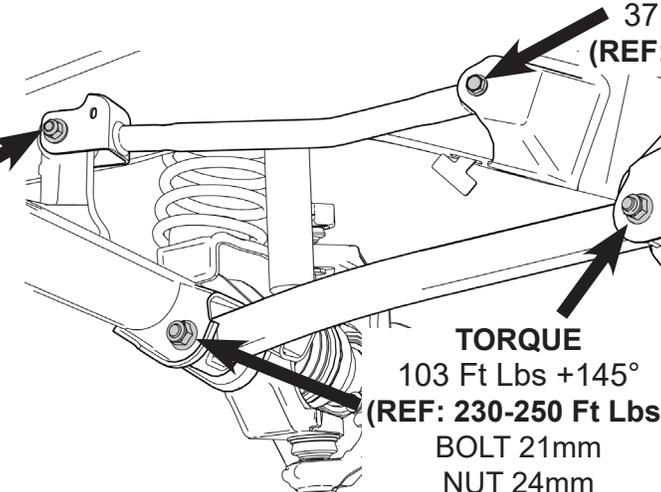

**TORQUE**  
103 Ft Lbs + 145°  
(REF: 230-250 Ft Lbs)  
BOLT 21mm  
NUT 24mm

**36**

# JT TIRE CLEARANCE GUIDE (for vehicles with FACTORY FENDER FLARES)

By limiting suspension up travel, TeraFlex Bump Stops allow the use of larger tires while keeping the factory fenders.

JT Rubicon models feature high-clearance fenders that allow for more up travel, while the lower-clearance fenders on JT Sport and Overland restricts tire size due to fender rubbing.

In order to address these fender differences, TeraFlex designed a proprietary modular bump stop system, which can be adapted to fit several different lift height and tire size configurations.

Additional 0.5" interlocking spacers can be added to fine tune bump stop height and further limit suspension up travel.

## JT RUBICON

with Factory Fender Flares:

### 1.5" LEVELING KIT


- 35" - 1" Front & No Rear Bump Stop\*



\*For vehicles with TERAFLEX Nomad Wheels, add 0.5" Bump Stop to the rear axle.


### 2.5" LIFT KIT

- 35" - 2" Front & 1" Rear Bump Stops

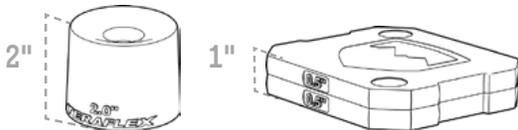

### 3.5" LIFT KIT

- 37" - 2" Front & 2" Rear Bump Stops

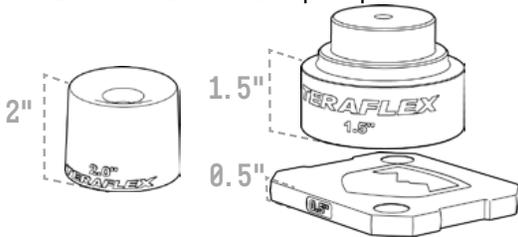

*Recommended Bump Stop configuration based on tested tires. Not all Tires Measure the Same. Cycling the suspension to check the shocks, springs and other suspension componets before driving is recommended.*

## JT SPORT/OVERLAND

with Factory Fender Flares:

### 1.5" LEVELING KIT


- 33" - 1" Front & No Rear Bump Stop\*



\*For vehicles with TERAFLEX Nomad Wheels, add 0.5" Bump Stop to the rear axle.


### 2.5" LIFT KIT

- 35" - 2" Front & 1" Rear Bump Stops

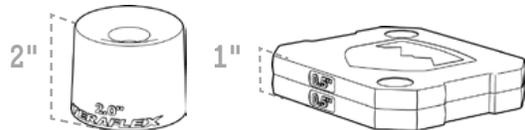

### 3.5" LIFT KIT

- 35" - 2" Front & 2" Rear Bump Stops

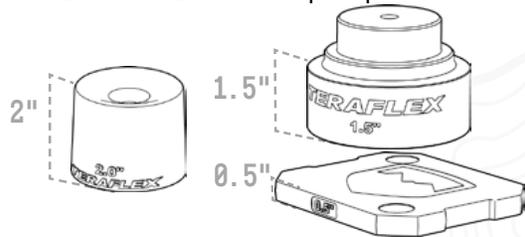


### 2-3 Inch Shock Options

#### JT Falcon Adjustable PiggyBack Shocks

- 4 Door Series 3.3, 14-02-33-400-150


- \*Fast Adjust Knob
- \*High Flow Oil Channel
- \*Offset Sleeve Design
- \*PiggyBack Reservoir

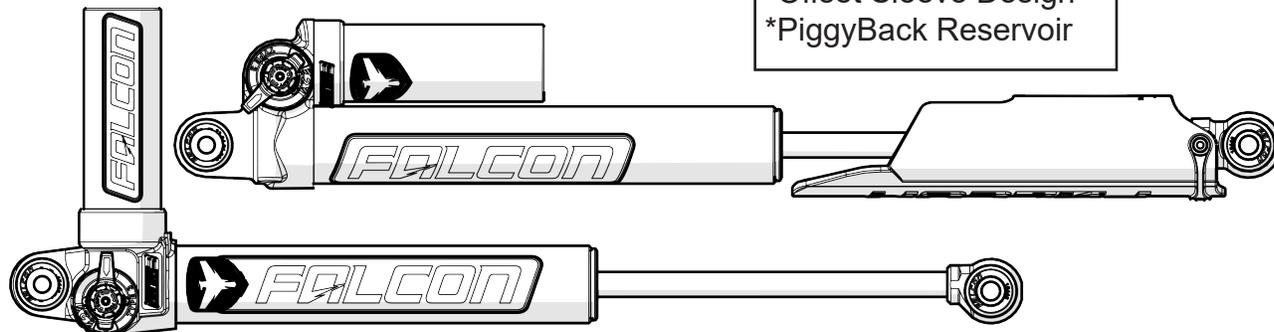

#### JT Falcon PiggyBack Shocks

- 4 Door Series 3.1, 14-02-31-400-150


- \*Series 3.3 Upgradable
- \*High Flow Oil Channel
- \*Offset Sleeve Design
- \*PiggyBack Reservoir

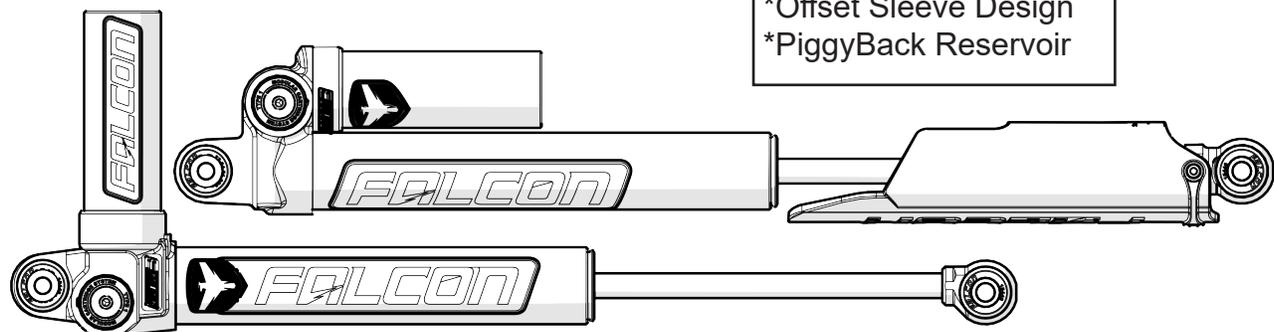

#### JT Falcon Monotube Shocks

- 4 Door Series 2.1, 14-02-21-400-200

- \*Oil Gas Separator
- \*3/4" Chrome Shaft
- \*Offset Sleeve Design
- \*JT Specific Shock

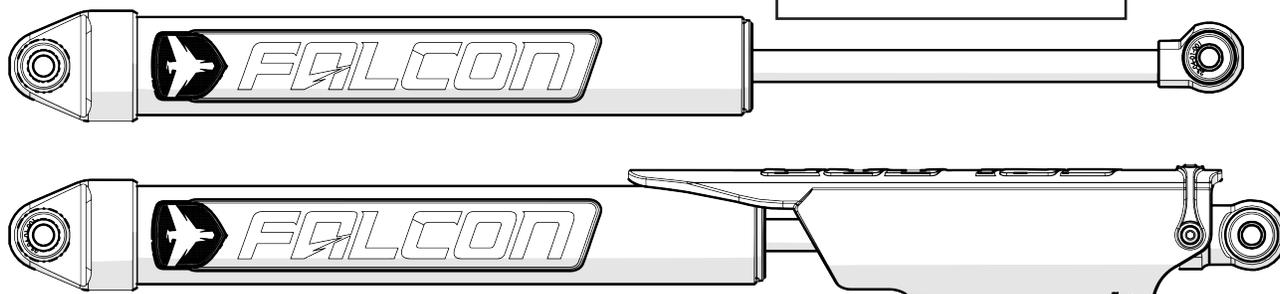

# TERAFLEX

## PRODUCT INFORMATION

### MAINTENANCE INFORMATION:

It is the buyer's responsibility to have all suspension, drivetrain, steering, and other components checked for proper tightness and torque after the first 100 miles and every 3000 miles after that.

### NOTICE TO INSTALLER:

The enclosed "Warning to Driver" sticker must be installed in the vehicle in driver's view. This sticker is to act as a constant safety reminder when operating the vehicle. It is your responsibility as the equipment installer to install the provided sticker and to forward the product instructions to the vehicle's owner for review. If a "Warning to Driver" sticker or product installation guide were not included in the kit, FREE replacement stickers and instructions are available by request. It is the installer's duty to ensure a safe and controllable vehicle after the modifications have been performed.

### WARNING:

Neither the seller nor the manufacturer will be liable for any loss, damage, or injury directly or indirectly arising from the use of or inability to determine the use of these products. Before using, the user shall determine the suitability of the products for its intended use, and the user shall assume all responsibility and risk in connection therewith.

### WARNING TO DRIVER:

This vehicle has been modified to enhance off road performance and has unique handling characteristics. Use in harsh environments can cause extreme stress on the components. Vehicle should be inspected after being off road to make sure that all the components are in working order and safe to travel on the highway. All fasteners should be checked so that they are at the correct torque specifications as the vibration and stresses from off roading may cause critical fasteners to work loose. Extra care should be taken to inspect the critical components, steering, and brake systems. During each oil change components such as arms, tie rod ends, etc should be greased and checked for excessive wear. Any worn components should be replaced. When returning to the pavement always set or restore tire air pressure to the factory recommendation and connect or engage any disabled sway bar mechanisms. Because of the higher center of gravity and larger tires, this vehicle handles and reacts differently than many passenger cars, both on and off road. You must drive it safely! Extreme care should be taken to prevent vehicle rollover or loss of control, which can result in serious injury or death. Avoid sudden sharp turns or abrupt maneuvers. Generally, braking performance and capabilities are decreased when significantly larger/heavier tires are used, especially when used in combination with transfer case low-range reduction kits. Take this into consideration while driving. Do not add, alter or fabricate any factory or aftermarket parts to increase vehicle height over the intended height of the TeraFlex product purchased. Mixing component brand is not recommended. TeraFlex Inc. will not be responsible for any altered product or any improper installation or use of our products. We will be happy to answer any questions concerning the design, function, and correct use of our products. It is ultimately the buyer's responsibility to have all bolts/nuts checked for tightness after the first 100 miles and then every 3000 miles. Wheel alignment, steering system, suspension and drive line systems must be inspected by a qualified professional mechanic at least every 3000 miles.

### TERAFLEX PRODUCT WARRANTY:

TeraFlex Inc. warrants TeraFlex Suspension products to the original retail purchaser to be free of defects in material and workmanship for as long as the original purchaser owns the vehicle on which products were originally installed.

Failure to complete regular maintenance (grease every 3000 miles) on TeraFlex FlexArms will void this warranty. All other conditions of the standard TeraFlex product warranty apply.

All TeraLow products are covered by the TeraFlex two (2) year warranty to be free of defects in material and workmanship for two years from date purchased.

TeraFlex axles are covered by a 12-month warranty to be free of defects in materials and workmanship.

This warranty does not cover or include product finish, improperly installed or applied products, improperly maintained products, products or components used for racing or competition or damage due to abuse or neglect, products that fail due to the use of larger tire and wheel combinations.

All returns must be accompanied by an original invoice. It is the customer's responsibility to remove the product from the vehicle. Shipping charges are the responsibility of the customer. TeraFlex Inc. will pay the return freight if the product meets the terms of warranty.

This warranty is for the replacement or repair of defective TeraFlex products only and does not include freight charges, labor charges for removal of or installation of TeraFlex or related products or components, costs incurred due to down time of the vehicle, or lost profits due to vehicle down time.

A returned goods authorization number (RGA#) must accompany any returned products. For more information please contact a TeraFlex customer service representative.

### COPYRIGHT

©Copyright 2014. All rights reserved, TeraFlex Inc. Reproduction of this catalog and/or any of its contents without written permission is strictly prohibited.

TeraFlex® is a registered trademark of TeraFlex Inc. All trade names and logos including but not limited to TeraFlex, FlexArms, RockGuard, Monster, and LCG are protected by law and duplication of trade names and/or logos are strictly prohibited.

TeraFlex Inc. reserves the right to update, discontinue, redesign, modify finish, part number or component build parts if deemed necessary without written notice. TeraFlex Inc., and any associated dealers are not responsible for misprints or typographical errors that may have inadvertently been made within this instruction sheet.

Jeep® and the Jeep® grill are registered trademarks of Fiat Chrysler Automobiles N.V., and have no affiliation with TeraFlex Inc.

**TERAFLEX**, Inc.  
5680 West Dannon Way  
West Jordan, UT. 84081  
Phone/801.713.3314  
Fax/801.713.2313  
www.teraflex.com